


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: None

Index File No. A-4

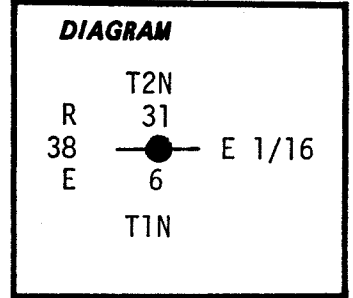

Description of corner evidence found: None

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** Corner set from survey by single proportionate measurement. At the corner point we set a 2"x30" galvanized iron pipe, 22" in the ground with brass cap attached, marked:

From which we mark new BT's:

A 16" Ponderosa Pine, scribed "E 1/16 S31 BT" on a double blaze bears West 23.3 ft.,

A 16" Ponderosa Pine, scribed "E 1/16 S6 BT" on a double blaze bears S85° E 26.5 ft.,

A 20" Douglas Fir, scribed "E 1/16 S6 BT" bears S12½° E 29.0 ft.

Attached brass washers marked "LS 1099" to lower blaze of new BT's.

Placed steel fenceposts 5' W & S of monument with signs 54-2 and 54-9 attached.

Attached signs and painted BT's per Standard Specifications For Cadastral Survey, U.S.F.S. Region 6, October 1979.

T2N  
 R S31  
 38 ——— E 1/16  
 E S6  
 T1N  
 PLS 1099  
 1980

I hereby certify that the above described corner and/or accessories was established on October 9, 1980.

Compass Declination: 18° East

Witness: Mike Wagoner

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Gary L. Langlitz*  
**OREGON**  
 JULY 22, 1997  
**GARY L. LANGLITZ**  
 1099

Office of.....County Surveyor..... County of.....Union.....  
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....

..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received \_\_\_\_\_  
 ☆ GPO—798-276

Date Filed \_\_\_\_\_

File No. 3-84 R

File No. 3-84 R

File No. 3-84 R  
 File No. 3-84 R