


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Jacob C. Cooper
 Contract No. 397
 July 14, 1881
 80.00 CH
 Set post 4 ft. long, 4 ins. sq., 2 ft. in ground,
 marked T 2 N, S 33 on the N.E., R 38 E, S 4 on the S.E.,
 T 1 N, S 5 on the S.W., and S 32 on the N.W. with
 4 notches on the East and 2 notches on the West, from
 which;



- A Fir 12" Ø bears S 30° W, 10 Lks. marked T 1 N, R 38 E, S 5 BT
- A Fir 8" Ø bears S 49° E, 25 Lks. marked T 1 N, R 38 E, S 4 BT
- A Fir 12" Ø bears N 58° E, 9 Lks. marked T 1 N, R 38 E, S 33 BT
- A Fir 14" Ø bears N 27° W, 14 Lks. marked T 1 N, R 38 E, S 32 BT

Description of corner evidence found:


No Evidence Found

Description of monument and accessories established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" iron pipe 26" in the ground with a Brass Cap, marked as shown, from which I scribe BT's;

- A Spruce 11" Ø bears S 17° E, 19.20 ft., marked T 1 N, R 38 S 4 BT
- A Spruce 14" Ø bears S 34° W, 43.70 ft., marked T 1 N, R 38 S 5 BT
- A Spruce 14" Ø bears N 41° W, 72.10 ft., marked T 2 N, R 38 S 32 BT
- A Spruce 18" Ø bears N 85° E, 32.80 ft., marked T 2 N, R 38 S 33 BT

I nailed a brass washer marked OPLS 1097 to BT blazes.
 I set a steel fence post 5 ft. North with signs 54-4.
 I painted a red band around BT's and face of scribe.
 I used a steel tape and magnetic compass with 19° East variation and measured a horizontal distance to the center of the BT's.
 This corner was set 8/5/80, witness by Patrick Murphy.
 See map of survey.

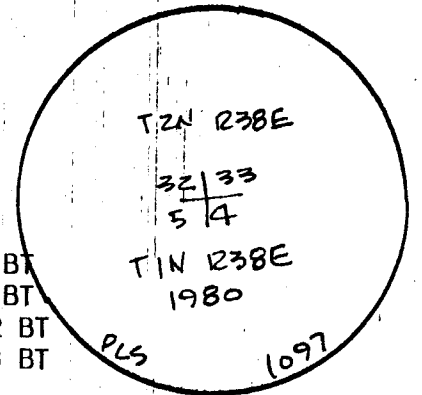

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

James H. Buisman

**OREGON
 JULY 22, 1977
 JAMES H. BUISMAN
 1097**

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of

..... by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
 SURVEYOR**

Date Received _____

Date Filed _____

By _____ GPO 796 111

File No. 6-84R