


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

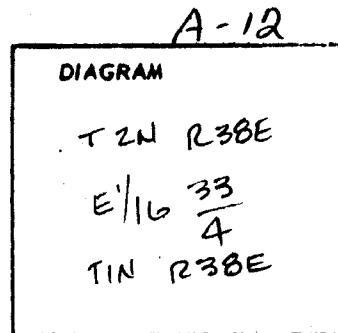

Description of corner evidence found:

N/A


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2½" x 30" iron pipe 24" in the ground with a Brass Cap marked as shown, from which I scribe BT's.

Fir 15" N 48°43' E 52.00 ft., scribed E 1/16 S 33 BT.

Fir 12" S 52°17' E 47.50 ft., scribed E 1/16 S 4 BT

I nailed a brass washer marked OPLS 1097 to BT blazes.
 I set a steel fence post 5 ft. North and 5 ft. East with signs 54-2 and 54-4 & 54-2.
 I painted a red band around BT's and face of scribe.
 I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.
 This corner was set 8/05/80, witness by Patrick Murphy.
 See map of survey.

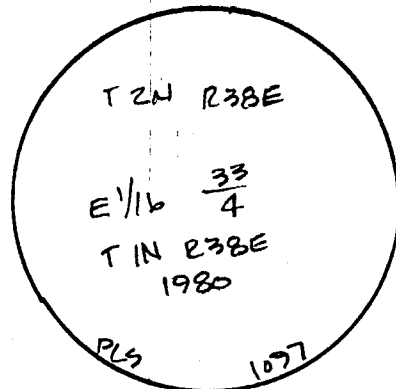

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the day of

..... by
 (COUNTY OFFICIAL) (DEPUTY)

**UNION COUNTY
SURVEYOR**

Is Received _____

Date Filed _____
GPO 770-000

By _____

File No. 8-84 R