


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-14

History of original corner establishment:

Corner not previously established.

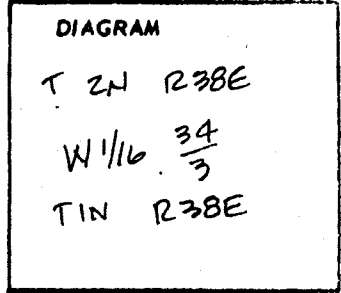

Description of corner evidence found:

N/A


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 24" in the ground with a Brass Cap, marked as shown from which I scribe BT's:

Fir 12" S 76°34' W , 21.20 ft, scribed T 2 N, R 38 E, W 1/16, S 34 BT

Spruce 22" N 07°50' W , 55.00 ft, scribed T 1 N, R 38 E, W 1/16 S 3 BT

I nailed a brass washer marked OPLS 1097 to BT blazes. I set a steel fence post 5 ft. West, 5 ft. East, with signs 54-2 & 54-4 & 54-2. I painted a red band around BT's and face of scribe. I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's. This corner was set 8/20/80, witness by Patrick Murphy. See map of survey.

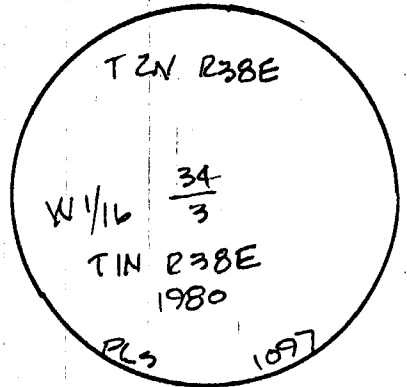

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of County of
State of , I hereby certify that the within instrument was filed in this office
for record on the day of
..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Received _____

Date Filed PO 796-333 _____

By _____

File No. 10-84 R