


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:

Corner not previously established.

T 2 N R 39 E O-20

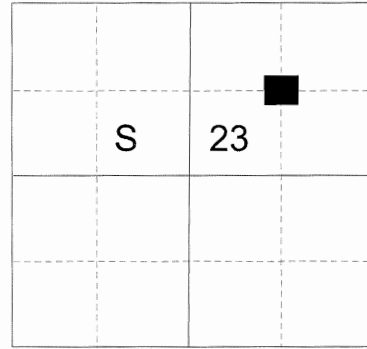

DESCRIPTION OF CORNER EVIDENCE FOUND:

SEE SURVEY NUMBER CS 010-2018

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by survey, I set a 5/8" x 30" iron pin, 25 inches in the ground, with 2' collar of stone, from which:

NEW BEARING OBJECTS:

A 5" White Fir bears North 82° East, a distance of 7.60 feet, marked X BT.

A 7" Douglas Fir bears South 66° West, a distance of 21.15 feet, marked NE 1/16 S23 BT.

Remnants of East and West running barb wire fence bears approx. 15 feet South.

I hereby certify that this monument was set March 28, 2018. Corner falls approx. 150 feet West of centerline of Palmer Junction Rd.. Set a steel fencepost approx. 1.5 ft. North of corner monument.

Witness: Kyle Tucker

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
June 2, 2010
JEFFREY S. HSU
83571

Renewal Date: June 30, 2019


**UNION COUNTY
SURVEYOR**

Date Received 4/12/18

Date Filed 4/12/18

Filed By Rich G. Meni

File Number 007-2018R

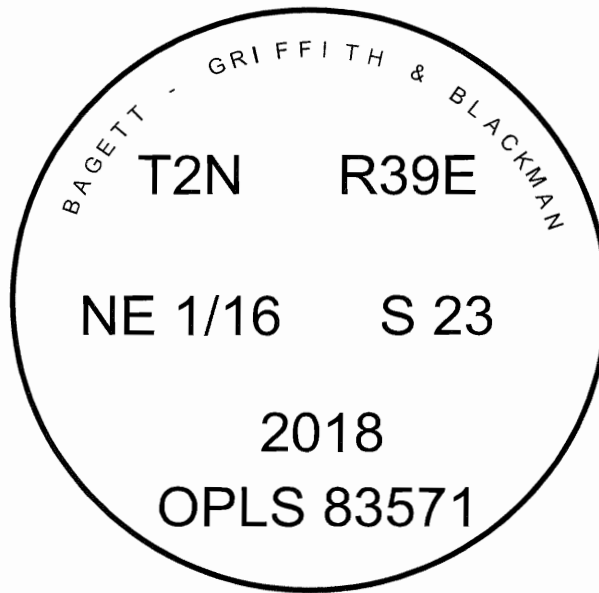

I use a steel tape and magnetic compass in the establishment of the bearing trees. Magnetic declination used was 15° East. Distances are to a spike in the root crown of the trees. Bearings are to a brass washer in the lower blaze marked OPLS 83571.