


**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT**

Survey No. 67-75 calls an existing fence the North line of the Southwest 1/4 of the Southwest 1/4 without breaking the Section. I found a monument set near the true Southwest 1/16 of Section 9 but do not accept it as the Section was not properly subdivided.

T 2 S R 38 E H-10

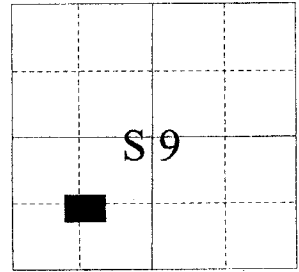

No record of subsequent monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found monument by Survey 67-75, did not accept. Position determined by Survey No. 73-78.

See Survey No. 73-78

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by Survey No. 73-78 I set a 5/8" x 30" iron pin with a 2" aluminum cap, marked as shown below, 30" in the ground from which:

A 5/8" x 30" rebar bears N8°59'E, a distance of 37.28 feet.

A 5/8" x 30" rebar with 1 1/2" aluminum cap bears S59°38'E, a distance of 6.59 feet, marked BGB SURVEY MARKER SOUTH RP.

I set a steel fence post approximately 1 ft. North of the monument.


I hereby certify that the corner was monumented on January 5, 2001  
Witness: Norbert W. Volny and Rick G. Robinson.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

Renewal Date December 31, 2002

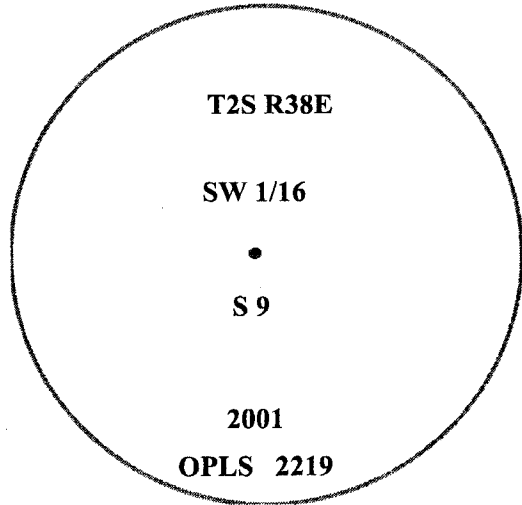

**UNION COUNTY  
SURVEYOR**

Date Received 2/12/01

Date Filed 3/2/01

Filed By *[Signature]*

File Number 001-2001R

I used a Leica 500 GPS unit in the establishment of the new accessories. The Basis of Bearings is the same as that on Minor Partition for John Melland. The distances are to the center of a 5/8"x30" rebar.