


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Jacob C. Cooper
Contract No. 397
July 14, 1881
40.00 CH
Post 3 1/2 ft. long 3 ins. sq., 1 1/2 ft. in grnd, marked
1/4 s on N & S faces from which;
A tamarack 4 ins. Ø bears S 10° W, 9 Lks marked 1/4 s BT
A tamarack 4 ins. Ø bears N 30° E, 14 Lks marked 1/4 s BT

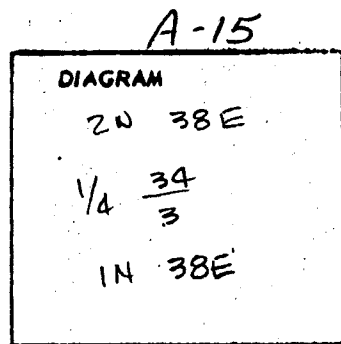

Description of corner evidence found:

None Found


Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 24" in the ground with a Brass Cap marked as shown, from which I scribe BT's.

Fir 8" N 00°42' E, 17.90 ft., T 2 N, R 38 E, S 34 BT

Fir 8" S 17°45' E, 12.60 ft., T 1 N, R 38 E, S 3 BT

I nailed a brass washer marked OPLS 1097 to BT blazers.
I set a steel fence post 5 ft. North and 5 ft. East with signs 54-4 & 2 and 54-2.
I painted a red band around BT's and face of scribe.
I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.
This corner was set 8/13/80, witness by Patrick Murphy.
See map of survey.

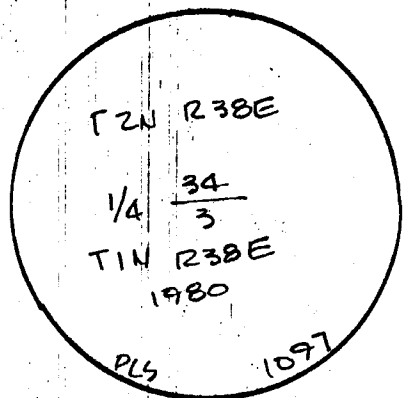

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the day of.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR

Received _____

Date Filed _____

By _____

File No. 11-84R

GPO 796-333