

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Jacob C. Cooper under Contract No. 397, dated July 1, 1881, page 399, of the Government Field Notes.

80.00 chains set 4' long, 4" square, post, 2' in the ground marked T 2N S 35 on NE face, R 38E S 2 on SE face, T 1N S 3 on SW face, 1 S 34 on NW face with 2 notches on E face and 4 on W face.


From which:

- A pine 34" in diam. bears N 51° E 30 lks. marked T 2N R 38E S 35 BT.
- A pine 18" in diam. bears S 14° E 40 lks. marked T 1 N R 38E S 2 BT.
- A pine 26" in diam. bears S 89° W 19 lks. marked T 1N R 38E S 3 BT.
- A fir 12" in diam. bears N 47° W 45 lks. marked T 2N R 38E S 34 BT.

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

- I found a fir bearing N 47° W a broken stump with the tree downhill and faint scribing visible.
- I found a pine bearing N 51° E uprooted with faint scribing visible.
- I found a pine 22.5" in diam. now bears S 09° E 26.40' with scribing visible is still a good BT.
- I found a pine 25.0" in diam. now bears S 87° W 12.54' with scribing visible is still a good BT.



Description of monument and accessories established to perpetuate the original location of this corner

Set 2½" x 30" iron pipe 20" in the ground with a brass cap marked as shown.

From which I scribed new BTs:

- A pine 20.8" in diam. bears N 06° W 47.25' scribed T 2N R 38E S 34 BT.
- A pine 20.0" in diam. bears S 49° E 24.34' scribed T 1N R 38E S 2 BT.

New bearing to old BTs:

- A pine 22.5" in diam. now bears S 09° E 26.40'.
- A pine 25.0" in diam. now bears S 87° W 12.54'.

- I nailed BT posters and attention signs to BTs.
- I nailed brass washers marked PLS 1097 to BTs.
- I set a steel post 3' West with an attention sign.
- I painted a red band and scribed blazes of all BTs.
- I used a staff compass with 21° declination and a steel chain, measuring distances horizontally.
- I set a post on the East side of the road S 85° W 800' from corner.

This corner was set October 16, 1979. Witness by Patrick L. Murphy and Timothy W. Torgerson.


CLATSOP COUNTY SURVEYOR

Received _____

Date Filed _____

By _____

File No. 13-84 R

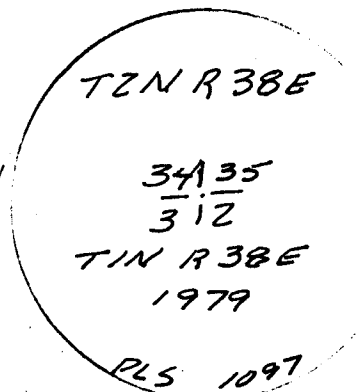

Office of _____ County Surveyor _____ County of _____ Union _____
 State of _____ Oregon _____, I hereby certify that the within instrument was filed in this office
 for record on the _____ day of _____

 (COUNTY OFFICIAL) by _____ (DEPUTY)

REGISTERED PROFESSIONAL LAND SURVEYOR

James H. Buisman

OREGON
 JULY 22, 1977
 JAMES H. BUISMAN
 1097