

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


C-13

History of original corner establishment:

SET IN SEPTEMBER 1891 BY KIMBRILL

A WOODEN POST 4' LONG 3" SQUARE 24" IN THE GROUND

8" PINE S26W 64LKS. MKD. $\frac{1}{4}$ S BT
24" FIR SO1E 75LKS. MKD. $\frac{1}{4}$ S BT

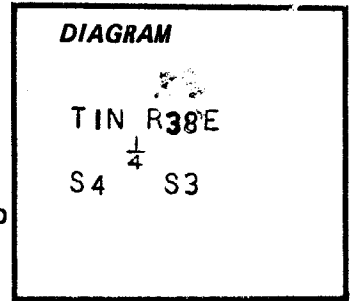

Description of corner evidence found:

SMALL MOUND OF STONES


18" PINE S26W 42.2' SCRIBING VISIBLE

Description of monument and accessories I established to perpetuate the original location of this corner:

SET A 2"x30" IRON PIPE WITH A BRASS-CAP MARKED: TIN R38E
 $\frac{1}{4}$ S4 S3
 1978
 RLS 346

18" PINE 115.9' N79E MKD. $\frac{1}{4}$ S3 BT

ALL BT'S HAVE A RED PAINTED STRIPE AND BEARING TREE SIGNS. THE NEW BT HAS A BRASS WASHER STAMPED RLS 346. THERE IS A 6' STEEL FENCE POST WITHIN 5' OF THE CORNER.

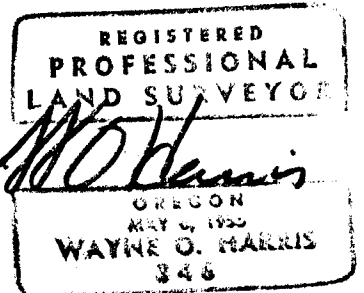

Office of.....COUNTY...SURVEYOR..... County of...UNION.....
State of.....OREGON... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY
SURVEYOR

I Received _____
★ GPO-798-276

Date Filed _____

By _____

File No. 24-84R