


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

E-15

History of original corner establishment:

Joseph G. Gray
Contract No. 120
May 27, 1867
39.85 CH
Set a post from which;

A Fir 8" dia. bears S 85° E, 35' Lks.
A Pine 15" dia. bears N 83° E, 41 Lks.

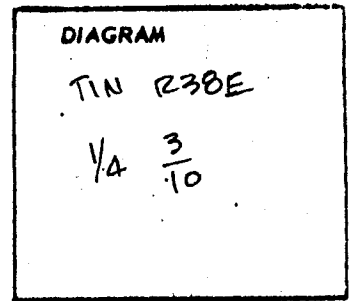

Description of corner evidence found:


None Found

Description of monument and accessories I established to perpetuate the original location of this corner

At the position described above, I set a 2 1/2" x 30" iron pipe 6" in the ground and raise a 3 ft. dirt mound, with a Brass Cap marked as shown, from which I scribe BT's;

Pine 17" N 29° 10' W, 15.60 ft., scribed 1/4 S 3 BT
Pine 15" S 66° 40' W, 34.00 ft., scribed 1/4 S 10 BT

I nailed a brass washer marked OPLS 1097 to BT blazes.
I set steel fence post 3 ft East with signs 54-4 & 54-2.
I painted a red band around BT's and face of scribe.
I used a steel tape and WILD T16 and measured a horizontal distance to the center of the BT's.
This corner was set 8/12/80, witness by Patrick Murphy.
See map of survey.

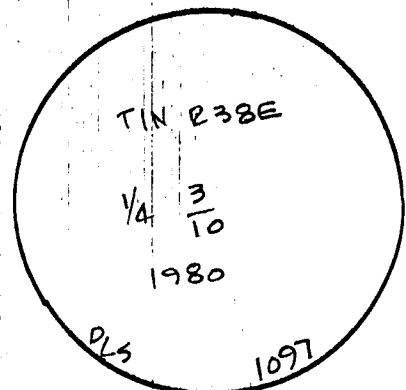

REGISTERED
PROFESSIONAL
LAND SURVEYOR

James H. Buisman

OREGON
JULY 22, 1977
JAMES H. BUISMAN
1097

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the day of

..... by
(COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR
Date Received _____
Date Filed _____
By _____ GPO 796-333
File No. 41-84 R