


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Joseph G. Gray under GLO contract No. 120 dated May 27, 1867.

Surveyor General Record states

- Set 1/4 section corner post from which:
- A pine 16" diameter bears S 73° E, 23 links
- A larch 6" diameter bears N 80° W 37 links

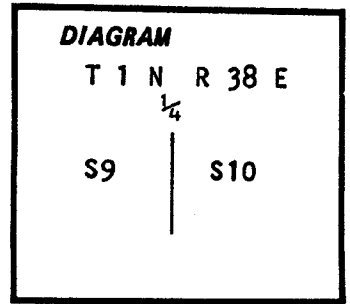

No record of subsequent monumentation found in County Records.


Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown 28" in ground from which:

- A 18" red fir bears N 43° E 12.3 Ft. marked 1/4 S10 BT
- A 14" tamarack bears N 17° W 56.5 Ft. marked 1/4 S9 BT

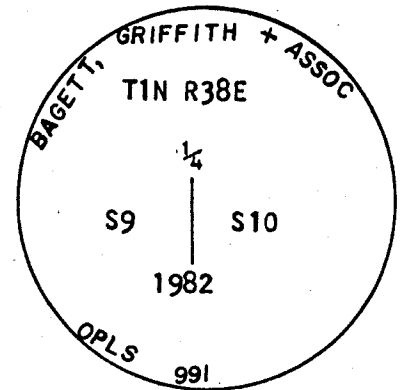

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Brass washer attached to BT blaze. Used steel tape and magnetic compass with 20° declination. Distances measured to center of tree.

Office of SURVEYOR County of UNION
 State of OREGON I hereby certify that the within instrument was filed in this office
 for record on the 1 day of OCTOBER 1982
Howard L. Perry by Ray J. Langley
 (COUNTY OFFICIAL) DEPUTY

UNION COUNTY SURVEYOR

Date Received _____

Date Filed _____

By _____

File No. 53-84 B