


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by contract dated July 20 1863;
 The original notes read; Set Post From which.
 A pine 5" in Diam bears N21°W 72 lks marked T1N R38E S8BT;
 A pine 12" in diam bears N49°E 62 lks marked T1N R38E S9BT;
 A pine 13" in deam bears S53°E 139 lks marked T1N R38E S16BT;
 A pine 10" in diam bears S26°W 17 lks marked T1N R38E S17BT;



Description of corner evidence found:


A 20" pine stump has rotted away leaving the heart with scribed T; bears N21°W 21 lks.;
 A slab from a trees on rotted log with full scribe bears S26°W;

UNION COUNTY SURVEYOR	
Date Received	_____
Date Filed	_____
By	_____
File No.	<u>62-84 R</u>

Description of monument and accessories I established to perpetuate the original location of this corner

At the position of the corner I set a 2" pipe with bronze cap on top and 30" in length. the pipe set to a depth of approx 18";
 The following new bearing trees were set;
 A pine 12" in diam bears N45°W a dist of 25 lks marked T1N R38ES8BT;
 A red fir 13" in diam bears S37°W a dist of 9 lks marked T1N R38ES17BT;;
 A red fir 26" in diam bears N14°E a dist of 28 lks marked T1N R38E S9 BT;
 A pine 13" in diam bears S70°E a dist of 25.2 lks marked T1N R38E S16BT;
 All distances are measured to BT scribe;
 All bearing trees new and old have ~~US~~ Bearing trees signs placed on them.

I stamped the disk.

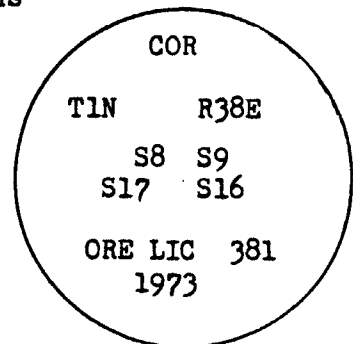

Office of County surveyor County of Union
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the Oct day of 1973, at 3 o'clock P. (signed)
James G. Voelz by _____
 (COUNTY OFFICIAL) (DEPUTY)

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

OREGON
 MAY 4, 1956
 JAMES G. VOELZ
 381