

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner established by Joseph G. Gray under GLO contract No. 120 dated May 27, 1867.

Surveyor General Record states

Set post corner for sections 9,10,15 and 16 from which:

- A pine 36" diameter bears S 1° W, 46links
- A pine 8" diameter bears N 50° W, 43 links
- A fir 20" diameter bears N 50° E, 78 links
- A fir 4" diameter bears S 40° E, 15 links

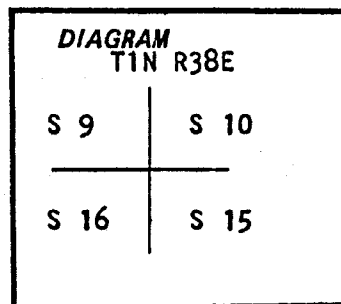

This corner was found by Kimbrell in 1891, Post decayed set post 4' x4' 24" in ground, new BT in section 15 to replace one burned out. New BT as follows:

A tamarack 8" diameter bears S 52° E, 62 links.

Description of corner evidence found:

None

Description of monument and accessories established to perpetuate the original location of this corner:

Set at double proportion distance I set a Bernstien cap marked as shown 26 " in ground from which:


- A 15" pine bears N 6° E, 32.7 Ft. marked T1N R38E S10 BT
- A 12" tamarack bears S 48° E, 19.4 Ft. marked T1N R38E S15 BT
- A 17" red fir bears S 81° W, 19.7 Ft. marked T1N R38E S16 BT
- A 16" pine bears N 66° W, 34.3 Ft. marked T1N R38E S9 BT

Raised mound of stone

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON JULY 13, 1973 GREGORY T. BLACKMAN 991

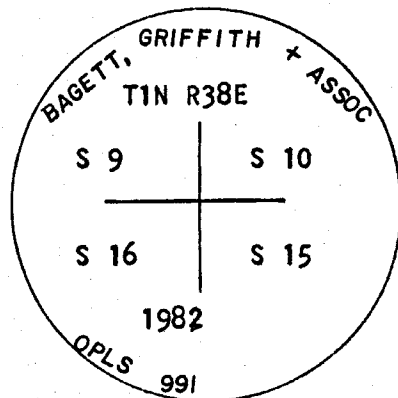

Used steel tape and magnetic compass with 20° E declination. Distances measured to center of tree.

Office of SURVEYOR County of UNION
 State of OREGON I hereby certify that the within instrument was filed in this office
 for record on the 1 day of OCTOBER 1982
Howard L. Peery by Nancy L. Langley
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received _____
 ☆ GPO-728-276

Date Filed _____

By _____

File No. 64-84R