


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established by Joseph G. Gray under GLO contract No. 120 dated May 27, 1867.

Surveyor General Record states

Set 1/4 section corner post from which:  
A larch 18" diameter bears S70°W 36 links  
A pine 8" diameter bears N65°W 71 links

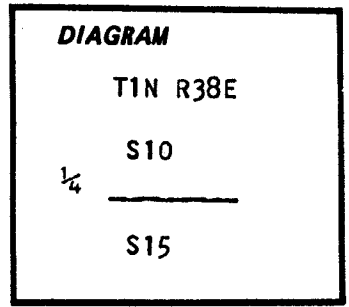

No record of subsequent monumentation found in County Records.

Description of corner evidence found:

None

Description of monument and accessories I established to perpetuate the original location of this corner:


At proportionate distance I set a 2 1/2' x 30" aluminum pipe with aluminum cap marked as shown 27" in ground from which:

A 12" tamarack bears N 30° E, 23.7 Ft. marked 1/4 S 10 BT  
A 14" d fir bears S 51° W, 37.0 Ft. marked 1/4 S15 BT

REGISTERED PROFESSIONAL LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

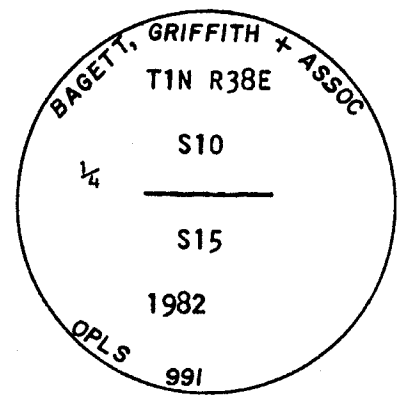

Used steel tape and magnetic compass with 20° E declination. Distances measured to center of tree.

Office of... SURVEYOR ..... County of... UNION .....

State of... OREGON ..... I hereby certify that the within instrument was filed in this office for record on the... 1... day of... OCTOBER ..... 1982

..... by Howard L. Perry (COUNTY OFFICIAL) by Gary J. Langlet (DEPUTY)

**UNION COUNTY SURVEYOR**

---

Date Received 10-798-276

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 66-84 R