


LAND CORNER MONUMENTATION

**History of original corner established:**

Corner originally established by Odell and Gray under GLO contract 120, dated May 27, 1867. This contract only established the south line of Township 2 South by running the north boundary of Sections 1 through 6 of Township 3, South, Range 37 East. The record notes states: Township 3 South, Range 37 East West on north boundary of Sec. 4 80.00 Chains - "Set post corner for sections 4,5,32,33. Deposited marked stone and raised stone mound as per instruction."



John A Hurlbrt surveyed Section 32 under contract 201, dated August 5, 1873 and completed June 12, 1874. No mention of the monument was recorded.

No record of subsequent monumentation found in Union County survey record.

**Description of corner evidence found:**

Found a dilapidated rock crib and remains of a barbed wire fence running north and west from said rock crib. Searched rock crib thoroughly but did not find evidence of marked stone. Using a single proportionate method along the range line between the southwest corner section 32 and the southeast corner of section 36 placed the rock crib 3-feet north and 16-feet westerly of the proportional solution. The physical evidence of the rock crib fence corner was held for the section corner.

See map of survey dated May 2002.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

I set a 2-3/8 inch brass cap attached to a 1-inch by 30-inch iron pipe having 2 split legs, set 20-inches into the ground with a mound of stones to brass cap face. The brass cap was stamped as shown.


**Accessories set:**

**Section 33** - 5/8" by 30" iron rebar with yellow plastic cap stamped "OREGON STATE PARKS" set in mound of stones bearing North 51°13'00" East, 15.70 feet from section corner monument.

**Section 4** - 5/8" by 30" iron rebar with yellow plastic cap stamped "OREGON STATE PARKS" set in mound of stones bearing South 84°32'40" East, 13.86 feet from section corner monument.

**Section 5** - 5/8" by 30" iron rebar with yellow plastic cap stamped "OREGON STATE PARKS" set in mound of stones bearing South 34°23'36" West, 9.25 feet from section corner monument.

**Section 32** - 5/8" by 30" iron rebar with yellow plastic cap stamped "OREGON STATE PARKS" set in mound of stones bearing North 63°36'40" West, 14.89 feet from section corner monument.

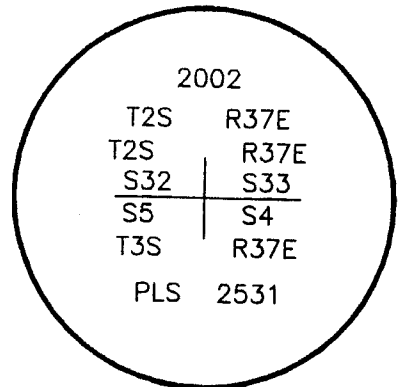

I hereby certify that the above corner was perpetuated as heron described on May 22, 2002  
Witnesses: Dean Timmerman, Richard A. Day

12/4/02  
REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*William L. Baierski*

OREGON  
JANUARY 21, 1992  
WILLIAM L. BAIERSKI  
2531  
RENEWAL DATE 12/31/03

I used a total station to establish the reference monuments.

UNION COUNTY  
SURVEYOR  
Date Received 12/9/02  
Date Filed 12/31/02  
By R. Robinson, Deputy  
File No. 038-2002R