


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner not set in original survey.



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Map of Survey No. 034-1994

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position as determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which;

NEW BEARING TREES:

- A 13 inch diameter Ponderosa Pine bears N 32° E, 10.07 feet marked C N BT
- A 15 inch diameter Ponderosa Pine bears S 40° E, 69.39 feet marked C X BT
- A 8 inch diameter Ponderosa Pine bears S 63° W, 36.95 feet marked C W BT
- A 11 inch diameter Ponderosa Pine bears N 38° W, 24.60 feet marked C 1/4 S15 BT

Painted a 6" red band around all BTs and attached Bearing Tree signs.

Set a steel fence post approximately 5 feet North with a Land Survey Monument sign attached.


UNION COUNTY SURVEYOR

Date Received 7/26/94

Date Filed 8/23/94

By [Signature]

File No. 023-1994R

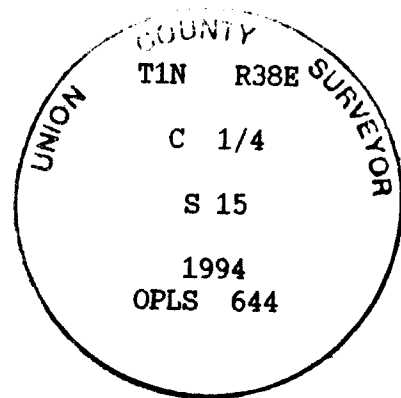

I hereby certify that the above corner point was perpetuated as hereon described on July 11, 1994. Witnesses: Travis Foster, Pete Crabtree and Mike Schlegel.

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON
JULY 10, 1994
DUANE I. GRIFFITH
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.