

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Joseph G. Gray on a joint venture with O'Dell under GLO contract Number 120, dated May 27, 1867. Surveyor General record states:

I set a post at the 1/4 corner of sections 15 and 14 from which:

A larch 12 inches in diameter bears N 25° W, 55 lks.

A larch 11 inches in diameter bears S 40° E, 7 lks.

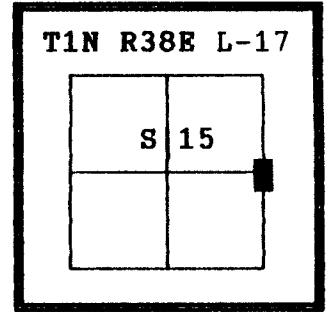

DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At proportionate position as determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 22 inches in the ground, from which;

NEW BEARING TREES:

- A 19 inch diameter Ponderosa Pine bears N 30° E, 66.57 feet marked 1/4 S14 BT
- A 26 inch diameter Douglas Fir bears S 21° E, 52.82 feet marked 1/4 S14 BT
- A 12 inch diameter Tamarack bears S 23° W, 58.58 feet marked 1/4 S15 BT
- A 20 inch diameter Blue Spruce bears N 54° W, 60.54 feet marked 1/4 S15 BT

Painted a 6" red band around all BTs and attached Bearing Tree signs.

Set a steel fence post approximately 5 feet North with a Land Survey Monument sign attached.


UNION COUNTY SURVEYOR

Date Received 7/26/94

Date Filed 8/23/94

By Gregory T. Blencoe

File No. 624-1994R

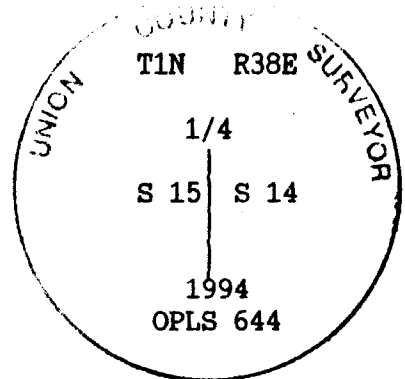

I hereby certify that the above corner point was perpetuated as hereon described on July 12, 1994. Witnesses: Travis Foster and Pete Crabtree.

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.