


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not established in original survey

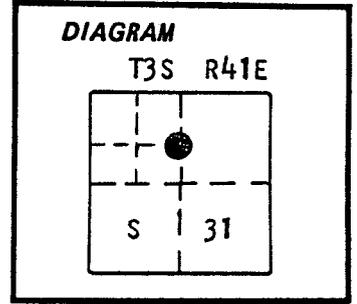

Description of corner evidence found:

NONE

**UNION COUNTY SURVEYOR**

---

Date Received 10-20-86  
 Date Filed 10-27-86  
 By G. LANGRISH, DEPUTY  
 File No. 239-86 R

See map of survey number 30-86 filed in the office of the Union County Surveyor  
 Description of monument and accessories I established to perpetuate the  
 original location of this corner: At position determined by survey, I set a 2 1/2"x30"  
 aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from  
 which:


A 10 inch Douglas Fir bears N 1° E, 45.02 feet, marked CN 1/16 S31 BT.

A 13 inch Tamarack bears S 31° E, 47.03 feet, marked CN 1/16 S31 BT.

Set a steel fence post approximately 5 feet South with a 54-9 sign attached.

Corner set : 9/11/86

Witness: Greg Blackman, Rick Robinson

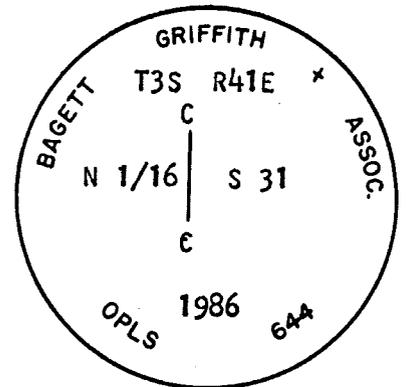

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*[Handwritten Signature]*

OREGON  
JULY 10, 1964  
**DUANE I. GRIFFITH**  
644

Brass washer marked OPLS 644 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BTs are to a 50d spike set in right side of tree when facing tree, unless otherwise stated.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19....

..... by .....

(COUNTY OFFICIAL)

(DEPUTY)


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner originally established me on Union County survey number 30-86. My remonumentation record states:

At position determined by survey, I set a 2½"x30" aluminum pipe with aluminum cap marked as shown, (markings shown below) 28 inches in the ground, from which;

A 10 inch Douglas Fir bears N1°E, 45.02 feet, marked CN1/16 S31 BT  
 A 13 inch Tamarack bears S31°E, 47.03 feet, marked CN1/16 S31 BT

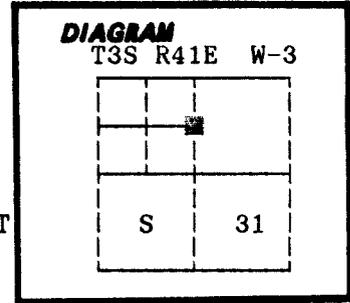

Corner set: 9/11/86  
 Witness: Greg Blackman, Rick Robinson

Set a steel fencepost approximately 5 feet South with a 54-9 sign attached

No record of subsequent monumentation found in Union County survey records.

**Description of corner evidence found:**

Found the corner monument and accessories as stated above.

Due to an error in placing the proportioned South ¼ corner of Section 31 on Union County Survey Number 29-86, I rebreak Section 31 and move the monument as per Union County Survey Number 24-88. The new ties to the accessories are shown below.

UNION COUNTY SURVEYOR	
Date Received	<u>8-9-88</u>
Date Filed	<u>8-24-88</u>
By	<u>G. LAUGLITZ DEWITT</u>
File No.	<u>90-88 R</u>


**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** At position determined by Union County Survey Number 24-88, I reset the above described monument 28 inches in the ground, from which;

New ties to the existing bearing trees:

A 10 inch diameter Douglas Fir bears N2°E, 45.02 feet marked CN1/16 S31 BT  
 A 13 inch diameter Tamarack bears S32°E, 47.48 feet marked CN1/16 S31 BT

I hereby certify that the above corner point was perpetuated as hereon described on July 22, 1988.

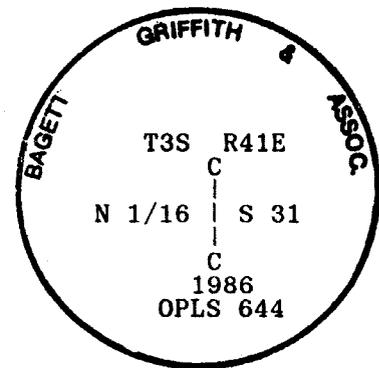

**REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR**

*Duane I. Griffith*  
 OREGON  
 JULY 10, 1964  
**DUANE I. GRIFFITH**  
 644

I used a steel tape and magnetic compass in the relocation of the existing accessories. I used 20° magnetic declination. The distances are to a 50d spike driven in the right side of the root crown.


Office of..... County of.....  
 State of....., I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 ..... by .....  
 (COUNTY OFFICIAL) (DEPUTY)

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHED:**

Corner originally established on Union County survey number 30-86. Union County monumentation record 239-86R states: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:  
A 10" Douglas Fir bears N1°E, 45.02 feet, marked CN 1/16 S31 BT.  
A 13" Tamarack bears S31°E, 47.03 feet, marked CN 1/16 S31 BT.  
Set steel fencepost approx. 5 feet South

T 3 S R 41 E W-03



Corner re-established on Union County survey number 24-88. Union County monumentation record 90-88R states: Due to an error in placing the proportioned South 1/4 corner of Section 31, I rebreak Section 31 and move the monument as per survey. At position determined by survey, I reset the above described monument 28 inches in the ground, from which:  
A 10" Douglas Fir bears N2°E, 45.02 feet, marked CN 1/16 S31 BT.  
A 13" Tamarack bears S32°E, 47.48 feet, marked CN 1/16 S31 BT.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found a 2 1/2" aluminum pipe, flush with ground, with 2 1/2" aluminum cap marked as shown, from which:

A 10" Douglas Fir bears North 2° East, a dist. of 45 feet, dead, down, and heavily decayed with scribes visible.

An 18" Tamarack bears S32°E, 47.48 feet, alive and vigorous with healed blaze.

Steel fencepost bears South 5'

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

From the aluminum pipe monument:

**NEW BEARING OBJECTS:**


A 7" Tamarack bears North 34° East a dist. of 11.65 ft., marked CN 1/16 S31 BT.

Fence corner from which fences run South and West bears approx. 2' North

I hereby certify that the corner was perpetuated on August 8, 2019.


Witness: Kyle A. Tucker

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR



OREGON  
June 2, 2010  
JEFFREY S. HSU  
83571

Renewal Date: June 30, 2019

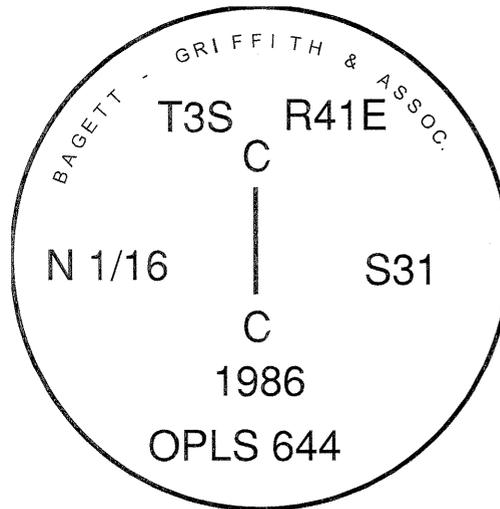

BAGGETT - GRIFFITH & ASSOC.  
T3S R41E  
N 1/16 S31  
C  
1986  
OPLS 644

UNION COUNTY  
SURVEYOR

Date Received 8/27/19  
Date Filed 8/27/19  
Filed By [Signature]  
File Number 045-2019R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 13° East declination, the distances are to a 60d spike driven into the right side of the root crown of the bearing trees. A brass washer marked OPLS 83571 is attached to the BT blaze of the new bearing trees.