

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

INDEX FILE No. R-7

History of original corner establishment:

Corner established by Joseph G. Gray under GLO contract Number 120 dated May 27, 1867

Surveyor General Record states; Set 1/4 Sec Cor post from which;


A larch 10 in dia bears N25E 10 lks
A fir 6 in dia bears S10W 20 lks

Corner retraced in 1891 by Kimbrell who set new post and took new BT for burned out original trees, new BTs as follows;

A fir 4 ins dia bears N86E 27 lks
A fir 4 ins dia bears S79W 19 lks

Description of corner evidence found:

Found Northeast Bearing tree

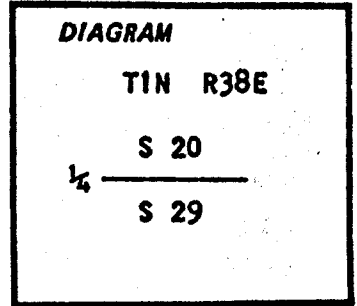

Description of monument and accessories established to perpetuate the original location of this corner:

At record bearing and distance from the Northeast bearing tree, I set a 1 1/2" x 30" iron pipe with brass cap marked as shown 28" in the ground, from which;


ORIGINAL BT

A 32" fir stump, flat surface 12" in tree and bits of wood with scribe bears N86E, 17.8 feet

NEW BTs

A 6 inch P.Pine bears S25E, 15.7 feet marked X BT
A 10 inch tamarack bears N61W, 20.6 feet marked 1/4 S20 BT

North-South fenceline 2 feet East

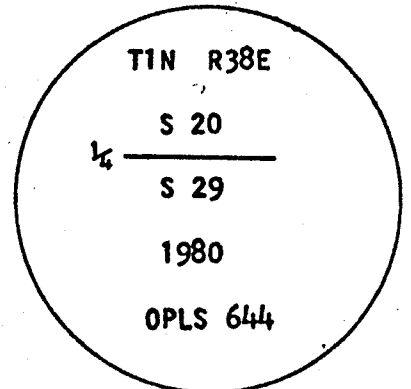

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° declination. Distance measured to center of tree

REGISTERED PROFESSIONAL LAND SURVEYOR

[Signature]

OREGON JULY 10, 1964 DUANE I. GRIFFITH 644

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office

for record on the..... day of....., 19.....

..... by

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

UNION COUNTY SURVEYOR

Date Received 4-1-82
 ☆ GPO-798-276
 Date Filed 4-5-82
 By G. LANGRISH, DEPUTY
 File No. 73-84R