


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

S-5

History of original corner establishment:

Corner not established in original survey.

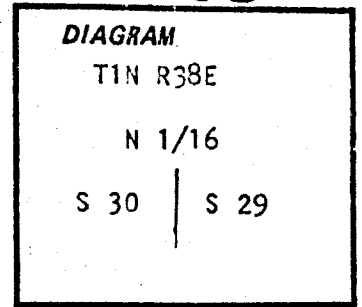

No record of subsequent monumentation found in County Records.

Description of corner evidence found:


See map of survey No. 73-80.

Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2" x 30" iron pipe with brass cap marked as shown 16" in ground, from which:

- A 11" fir bears S 66° E, 43.0 ft, marked N 1/16 S29 BT
- A 14" fir bears S 59° W, 45.8 ft, marked N 1/16 S30 BT

Raised mound of stone 4 ft base to top of cap.

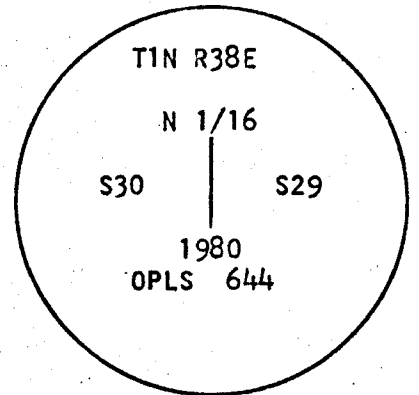

REGISTERED PROFESSIONAL LAND SURVEYOR

*Handwritten signature of Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

Brass washer nailed to BT Blaze. Used steel tape and magnetic compass with 17° E declination. Distance measured to center of tree.

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_  
★ GPO-798-276

Date Filed \_\_\_\_\_

By \_\_\_\_\_

File No. 77-84R