


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

T-7

History of original corner establishment:

Corner not established in original survey

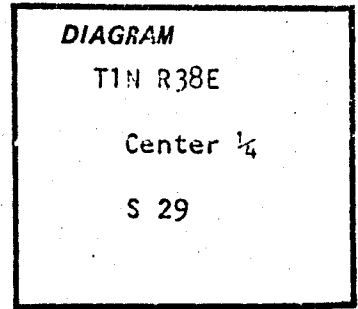

No record of subsequent monumentation found in County Records.


Description of corner evidence found:

See map of survey No. 73-80.

Description of monument and accessories I established to perpetuate the original location of this corner:

At center of section I set 1 1/2" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

- A 10" tamarack bears N 61° E, 35.2 ft marked C 1/4 S29 BT
- A 12" fir bears N 37° W, 25.8 ft marked C 1/4 S29 BT

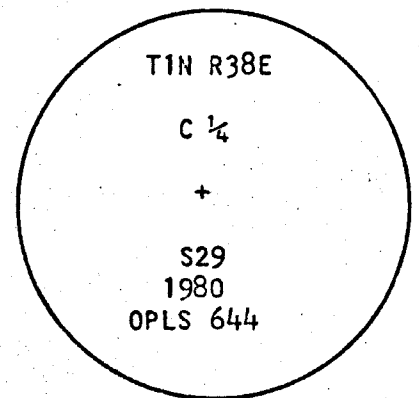

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

OREGON  
JULY 10, 1984  
DUANE I. GRIFFITH  
644

Brass washer nailed to BT blaze. Used steel tape and magnetic compass with 17° E declination. Distance measured to center of tree.

Office of..... County of.....

State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)

Form R6-7100-57 (9/71)

**UNION COUNTY SURVEYOR**

Date Received \_\_\_\_\_  
 ☆ GPO—798-276  
 Date Filed \_\_\_\_\_  
 By \_\_\_\_\_  
 File No. 80-84 R