

**UNION COUNTY SURVEYOR**


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established.

T 4 S R 38 E V - 20

No record of monumentation found in Union County survey records.

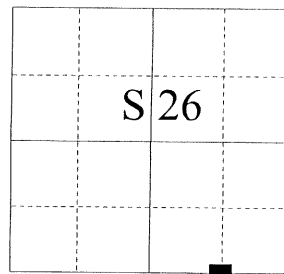

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found no evidence of any corner monumentation, an existing fence line with fences running West and South is 29 ft. South and 15 feet West of the true corner position.

See Survey No. 015-2003

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by said survey, I set a 5/8"x30" iron pin with a 2 1/2" aluminum cap marked as shown below, 28" in the ground, from which:

**New Bearing Objects:**

A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears S 26°32'W, a distance of 31.08 feet, marked BGB SURVEY MARKER S35 RP. (Falls in East edge of fence corner rock crib)

A 5/8" x 30" iron pin with 1 1/2" aluminum cap bears N 58°56'W, a distance of 24.83 feet, marked BGB SURVEY MARKER S26 RP.

Corner falls immediately South of a 2 rut road

Set a steel fence post approximately 1 ft. South of monument.

I hereby certify that the corner was monumented on May 13, 2003.


**UNION COUNTY SURVEYOR**

Date Received 5/22/03

Date Filed 6/14/03

Filed By [Signature]

File Number 02A-2003R

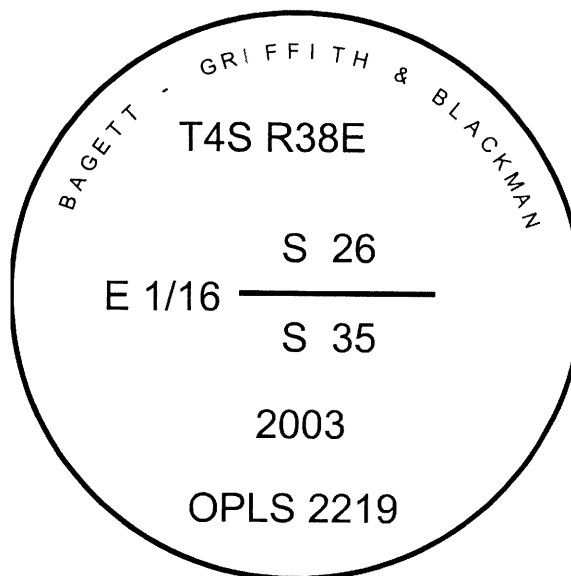

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

[Signature]  
OREGON  
July 17, 1986  
RICK G. ROBINSON  
2219

I used a Leica 530 GPS unit in the establishment of the new accessories. The Basis of Bearing is the same as map of survey number 015-2003. The distances are to the center of a 5/8"x30" iron pin with 1 1/2" aluminum cap.