


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Joseph G. Gray on a joint venture with O'Dell under GLO contract Number 120, dated May 27, 1867. Surveyor General record states:

I set post for quarter section corner from which:  
 A pine 9 in. Dia. Bears N 20°W, 138 lks.  
 A pine 28 in. Dia. Bears S 30°E, 121 lks.

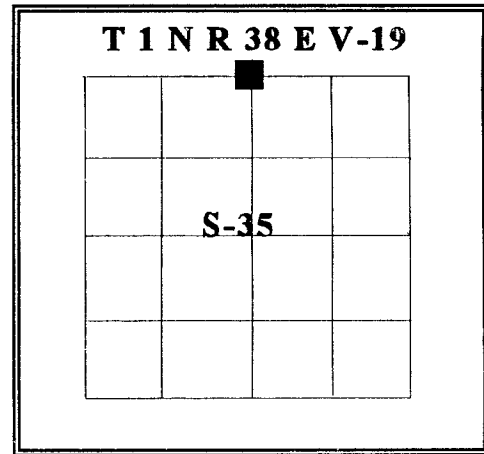

No record of subsequent monumentation was found in the Union County Survey records.  
**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None. Area is under cultivation.

See Map of Survey Number 022-1997.


**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At proportionate position I set a 5/8" by 24" copper-clad iron pin with brass cap marked as shown, 30 inches in the ground. Set in a water valve box in the center of the County Road.  
 From which,  
 New B O;

- A 5/8" by 30" rebar bears N 62°E, 44.19 feet, with 1-1/2" aluminum cap marked "UCS NE RP".
- A 5/8" by 30" rebar bears S 54°E, 49.81 feet, with 1-1/2" aluminum cap marked "UCS SE RP".
- A 5/8" by 30" rebar bears S 47°W, 31.05 feet, with 1-1/2" aluminum cap marked "UCS SW RP".
- A 5/8" by 30" rebar bears N 39°W, 41.03 feet, with 1-1/2" aluminum cap marked "UCS NW RP".

I hereby certify that the above corner point was perpetuated as hereon described on July 2, 1997.

Witnessed by: Jeff Madsen  
 Greg Blackman Jr.

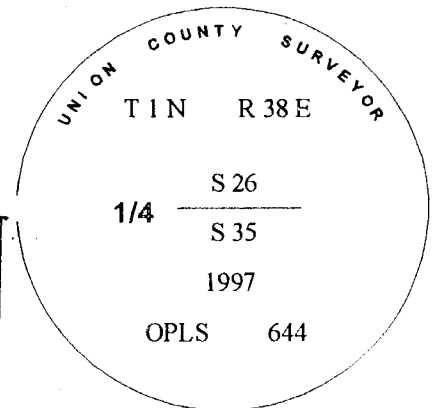

**UNION COUNTY SURVEYOR**

---

Date Received 8-28-97

Date Filed 9-13-97

By Gregory T. DeLuca

File No. 035-1997R



*Renewal Date July 30, 1999*

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° east declination and the measurement was taken to the center of the aluminum cap on the rebar.

**GEODETTIC CONTROL DATA**

**OREGON STATE PLANE, NORTH ZONE (3601)  
UNION COUNTY, OREGON**

\*\*\*\*\*  
STA. NAME: 9901

QUARTER CORNER:	GEODETTIC COOR: NAD 83(91)
SEC. <u>26</u>	LAT: 45:31'45.40846" N
SEC. 35 TWP.1 N. RGE.38 E	LONG: 118:01'31.81907" W
UNION COUNTY, OREGON	SP. COOR: NAD 83(91)
DATE TIED: JULY, 1999	N: 688773.166 INT.FT
SURVEYOR: WALTER L. CASWELL	E: 8836137.377 INT.FT.
PLS 737	THETA: 1:45'17.557"
FIRM: EAGLE GPS SURVEY CORP	SCALE FACTOR: 0.999914357
6110 SW LOMBARD AVE.	ELEV: 2860.26 U.S.FT.
BEAVERTON, OR. 97008-4736	ELEV. DATUM: NGVD 1929(1947)
(503) 643-1073	*****
TYPE: GPS	DIRECTIONS "TO REACH":
ORDER: SECOND CLASS: 1	

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Albert Hertel 10-14-99*

**OREGON  
JULY 18, 1880  
ALBERT HERTEL  
1896**

EXPIRES: 06/30/01

1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY  
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY  
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)  
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

JOB 99-005  
SHEET 21 OF 63