


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. J-25¹ (~~T4S R38E~~)

History of original corner establishment:

Original survey by T. Davenport, 1863, states:
Set post corner to Secs. 12, 13, 7, and 18 on the
East side of Rocky Point. Made mound of rock.

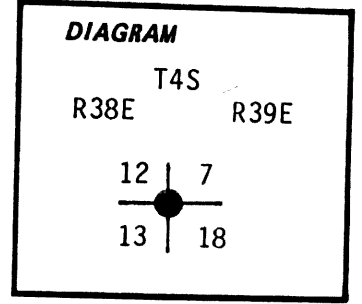

Description of corner evidence found:

Original monument not found. Refer to survey filed concurrently with
this record for basis of this location.

Description of monument and accessories I established to perpetuate the
original location of this corner:

At existing fence cor. (fences E-W-S) we set a 2"x30" Galvanized Iron Pipe,
16" in the ground, approx. 40 ft. east of the southerly end of a rock
outcrop, with brass cap attached, marked:

Raise mound of stone around monument.

We mark a bearing object: an "+B0" chiseled on
a vertical rock outcrop bears N 53° W 34.7 ft.

Placed steel fencepost with "ATTENTION" sign
attached alongside corner monument.


Compass declination: 20° East

T4S
R38E R39E

S12		S7
—		
S13		S18

PLS 1099
1981

Witnesses: Gary Langlitz
David Allen

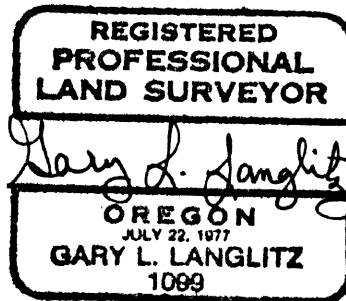

Office of..... Surveyor..... County of..... Union.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the 29 day of OCTOBER, 19 81
 Howard L. Perry..... by Gary L. Langlitz.....
 (COUNTY OFFICIAL) (DEPUTY)

UNION COUNTY SURVEYOR

Date Received 10-29-81

Date Filed 10-29-81

547-84R

File No. J-25 (~~T4S R38E~~)