

CHESEBRO & KALB

Land Surveying &
Boundary Consulting

P.O. Box 19
Mill City, OR 97360
(503) 897-2722

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Timothy W. Davenport, Aug 12, 1863, Contract No. 102

Set: post, from which:

A pine 6 ins. in dia. bears N 40° E 66 lks. (43.6 ft.) dist.

A pine 30 ins. in dia. bears S 50° W 30 lks. (19.8 ft.) dist.

John W. Kimbrell, 1891, Contract No. 579

Found: post, decayed, 3 ft. long 3 ins. square, post has fallen down but I find 12 ins. of point in the ground, from which

A pine 6 ins. in dia. bears N 40° E 66 lks. (43.6 ft.) dist. marked 1/4 S BT

A pine 30 ins. in dia. bears S 50° W 30 lks. (19.8 ft.) dist. marked 1/4 S BT

Howard L. Perry, PLS 1294, 1980, C.S. 38-80

Found: original BTs

A 6" pine, now 14" stump decayed, with scribing "BT" bears N 40° E 43.6 ft. (N 40° E 66 lks.)

A 30" pine stump flush in ground, no marks remaining, bears S 54° W 19.8 ft. (S 50° W 30 lks.)

Set: 2 1/2" x 30" galvanized iron pipe with brass cap

A 14" D. fir scribed "1/4 S32 1099 BT" bears S 84° W 124.1 ft.

A 22" P. pine scribed "1/4 S32 1099 BT" bears N 12° W 127.9 ft.

Gary L. Langlitz, PLS 1099, 1995, C.S. 35-95

Found: 2" galvanized iron pipe with brass cap, firmly set, and marked as described on Survey 38-80, with two bearing trees, alive and in good condition, as described on survey 38-80.

Description of corner evidence found:

Monument Found:

A 2 1/2 in. brass cap on a 2 1/2 in. galvanized iron pipe in a rock mound 2 ft. base and 1 ft. high with a guard post easterly 2.0 ft.

Accessories Found:

A pine stump, 14 ins. diam., bears N 40° E 43.6 ft., with visible scribing. (Orig. BT)

A pine stump, very rotten, bears S 50° W 19.8. (Orig. BT)

A Douglas fir, 20 ins. diam., bears S 84° W 123.6 ft. (record 124.1 ft.), with healed double blaze. (Perry BT)

A ponderosa pine, 25 ins. diam., bears N 12° W 126.8 ft. (record 127.9 ft.), with scribing visible on a double blaze. (Perry BT)

Description of monument and accessories I established to perpetuate the original location of this corner:

Accessories Set:

The North quarter corner for Section 5 bears S89°40'41"E 242.97 ft.

Red paint, posts and signs added as needed.

NAD 83 (CORS 2002) Coordinates:

Geographic State Plane (North Zone)

45°30'52.8657" N N 208,170.854 Meters

118°05'14.2188" W E 2,688,479.801 Meters


Convergence 1° 42'40"

Equipment: Nikon Total Station, Hand compass, Var. 18° E, logger's tape, clinometer

Date: July 11 & Sept. 17, 2003

Crew: Dick Chesebro, Collin Edwards-Hill, Ron Walter,

See also the Record of Survey filed concurrently with this certification.

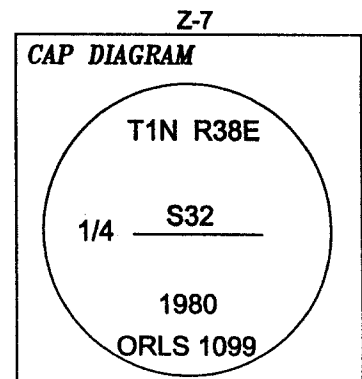

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Evelyn R. Kalb 7/19/04

OREGON
July 25, 1990
Evelyn R. Kalb
2456

EXPIRES: 06/30/2005

UNION COUNTY
SURVEYOR

Date Received 2/3/04

Date Filed 2/25/04

Filed By R. ROBINSON, Deputy

File Number 008-2004R