


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner was set in the original survey of the Base Line by Timothy W. Davenport under General Land Office contract number 102, dated July 20, 1863.

GLO notes state;

- Set post for corner to sects. 35 & 36, from which;
- A pine 30 in. dia. bears N 37°E, 321 lks. dist.
- A pine 18 in. dia. bears N 18°W, 397 lks. dist.
- A pine 18 in. dia. bears S 69°E, 362 lks. dist.

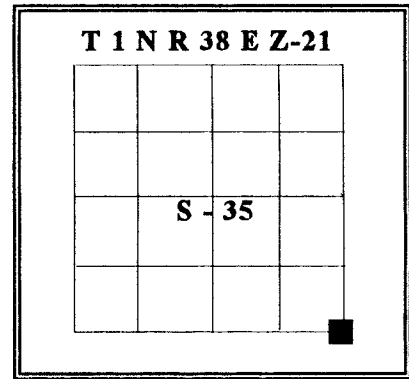

No record of subsequent monumentation found in the Union County Survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Found fence corner, fences east, west and north. I accept this fence corner as the best available evidence of the original corner. See Map of Survey Number 022-1997 for a detailed description of the supporting evidence.


See Map of Survey Number 022-1997.

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At a fence corner, fences east, west and north, I set 2-1/2 inch by 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground.

From which, new B Os;

- A 5/8" by 30" rebar bears N 4°E, 12.10 feet, with 1-1/2" aluminum cap marked "UCS NE RP".
- A 5/8" by 30" rebar bears S 85°E, 20.26 feet, with 1-1/2" aluminum cap marked "UCS SE RP".
- A 5/8" by 30" rebar bears S 88°W, 17.55 feet, with 1-1/2" aluminum cap marked "UCS SW RP".
- A 5/8" by 30" rebar bears N 78°W, 16.60 feet, with 1-1/2" aluminum cap marked "UCS NW RP".

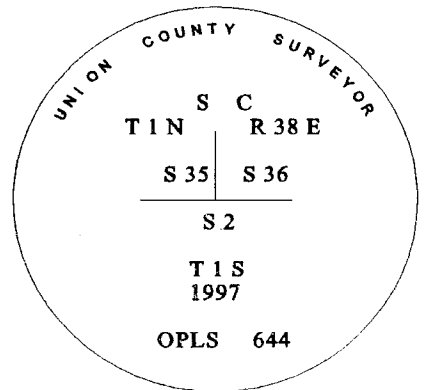

I hereby certify that the above corner point was perpetuated as hereon described on July 17, 1997.

Witnessed by: Jeff Madsen  
Greg Blackman Jr.



*Renewal Date July 30, 1999*

I used a steel tape and magnetic compass in the establishment of new accessories. I used 18° east declination and the measurement was taken to the center of the aluminum cap on the rebar.

**UNION COUNTY SURVEYOR**

---

Date Received 8-28-97

Date Filed 9-13-97

By Greg Blackman Jr.

File No. 042-1997R

**GEODETTIC CONTROL DATA**

**OREGON STATE PLANE, NORTH ZONE (3601)  
UNION COUNTY, OREGON**

\*\*\*\*\*

STA. NAME: 9904

**SECTION CORNER:**

SEC 35 | 36 TWP.1 N. RGE.38 E

SEC. 2 | 1 TWP.1 S. RGE.38 E

UNION COUNTY, OREGON

DATE TIED: JULY, 1999

**GEODETTIC COOR: NAD 83(91)**

**LAT: 45:30'53.07426" N**

**LONG: 118:00'54.36619" W**

**SURVEYOR: WALTER L. CASWELL  
PLS 737**

**SP. COOR: NAD 83(91)**

**N: 683557.089 INT.FT**

**FIRM: EAGLE GPS SURVEY CORP  
6110 SW LOMBARD AVE.  
BEAVERTON, OR. 97008-4736  
(503) 643-1073**

**E: 8838965.237 INT.FT.**

**THETA: 1:45'44.118"**

**TYPE: GPS**

**SCALE FACTOR: 0.999912793**


**ORDER: SECOND CLASS: 1**

**ELEV: 2793.09 U.S.FT.**

**ELEV. DATUM: NGVD 1929(1947)**

\*\*\*\*\*

**DIRECTIONS "TO REACH":**



*Albert Hertel 10-14-99*  
**OREGON  
JULY 18, 1980  
ALBERT HERTEL  
1896**

**EXPIRES: 06/30/01**

**1 METER = 3.280833... U.S. FEET = 39.37 INCHES EXACTLY  
1 METER = 3.280839895 INTL. FEET OR 1 INCH = 2.54CM. EXACTLY  
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)  
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)**

**JOB 99-005  
SHEET 25 OF 63**