

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**


(T1N R39E)  
A-1

**History of original corner establishment:**

Corner originally established by Timothy W. Davenport in 1863 under Government Contract Number 102. Surveyor General Notes state:

Set post corner to sections 1, 6, 31, 36 and townships now 1 and 2 N. Ranges 38 and 39 E from which:

- A pine 6" diameter bears N 15° W, 30 links dist.
- A pine 20" diameter bears N 55° E, 90 links
- A pine 24" diameter bears S 70° E, 36 links
- A pine 24" diameter bears S 40° W, 54 links



**Description of corner evidence found:**

Found original BTs

- pine 26" diameter N 18° W (N 15° W) 30 links scribes visible, living
- pine stump bears S 41° W (S 40° W) 54 links, blaze visible
- pine stump bears S 72° E (S 70° E) 36 links,

<b>UNION COUNTY SURVEYOR</b>	
Date Received	_____
Date Filed	_____
By	_____
File No.	<b>255-83 R</b>

**Description of monument and accessories I established to perpetuate the original location of this corner:**


I set a 2 1/2" x 30" galvanized iron pipe with brass cap marked as shown, 26" in ground and raised a mound of stone, at the called distance from the found BTs, I did not the called bearings, as I find too much difference between mine and the originals.

**New BTs**

- A douglas fir 18" diameter bears S 7° E, 5.2 ft marked T1N R39E S6 BT
- A fir 9" diameter bears N 77° E, 22.2 ft marked T2N R39E S31 BT
- A p. pine 10" diameter bears S 45° W, 80.0 ft marked T1N R38E S1 BT

**Original BT**

- A 26" pine bears N 18° W, 19.8 ft marked T2N R38 S36 BT

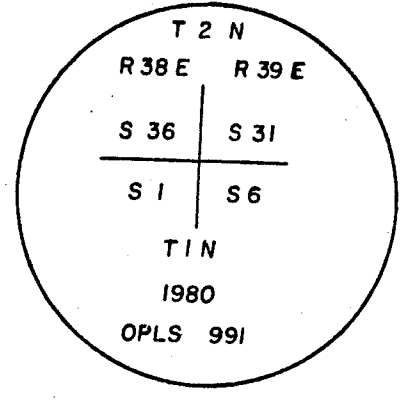

I used a steel tape and a magnetic compass with 20° E declination.

I set a brass washer marked O.P.L.S. 991 at the B.T. blaze

Office of..... County of.....  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the..... day of....., 19.....

..... by .....  
(COUNTY OFFICIAL) (DEPUTY)

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Gregory T. Blackman*

**OREGON**  
JULY 13, 1973  
**GREGORY T. BLACKMAN**  
991

# HORIZONTAL CONTROL DATA

## UNION COUNTY, OREGON

### OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2017012

SECTION CORNER COMMON TO SECTIONS 1, 6, 31 AND 36

TWP. 1 & 2N RGE. 38 & 39 E. GEODETIC COORD: NAD 83(91)

DATE TIED: June 22, 2017 LAT: 45 ° 36 ' 6.58754 " N

SURVEYOR: RICK G. ROBINSON LONG: 117 ° 59 ' 39.42929 " W  
OPLS 2219

FIRM: BAGETT, GRIFFITH, & BLACKMAN SP. COOR: NAD 83(91)  
2006 ADAMS AVENUE  
LAGRANDE, OR 97850 N: 715459.513 INT FT.  
(541) 963-6092 E: 8843313.855 INT FT.

TYPE: GPS THETA: 1 ° 46 ' 37.2626101 "


ORDER: SECOND CLASS: 1 SCALE FACTOR: 0.9999231283

ELEV: 4013.83 US FT.

ELEV: DATUM: NGVD 29

**COMMENTS:**

2 1/2" iron pipe with brass cap marked as sho

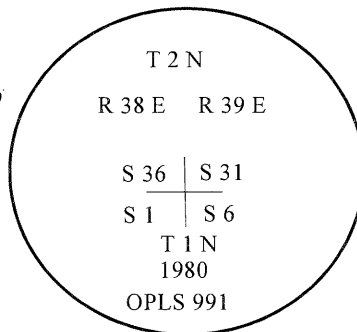

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Rick G. Robinson*

**OREGON**  
July 17, 1986  
**RICK G. ROBINSON**  
**2219**

Renewal Date: December 31, 2018

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR ( IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)