


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHED:  
Corner not previously established

T 1 N R 39 E B-10

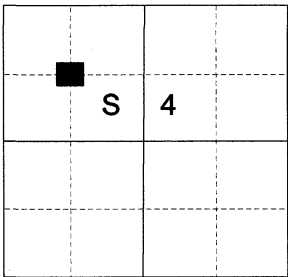

DESCRIPTION OF CORNER EVIDENCE FOUND:  
None.

SEE SURVEY NUMBER 018-2024

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO MONUMENT THE  
ORIGINAL LOCATION OF THIS CORNER:

At position by survey, I set a 5/8" x 30" iron pin, 23" in the ground, with a 2 1/2" aluminum cap marked as shown, in a 2.5 ft. diam. collar of stone, from which:

EXISTING BEARING OBJECTS:


A rock outcrop, 7' x 5' x 3' exposed, bears North 74°24' East, a dist. of 34.29 feet, chiseled X B0.  
A rock outcrop, 2' x 2' x 1' exposed, bears South 40°30' West, a dist. of 12.67 feet, chiseled X B0.

Set steel fence post approx. 0.5 ft. Northwest

Corner falls on West aspect.

I hereby certify that the corner was monumented on May 21st, 2024.

Witnesses: Kyle Tucker

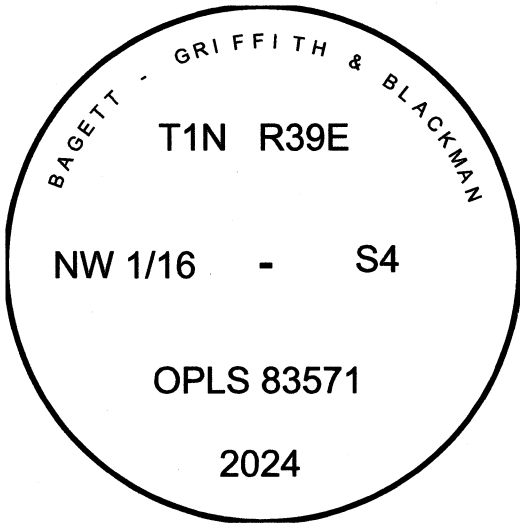

Renewal Date: June 30, 2025

I used a Leica GS18 with RTK in the establishment of the accessories. Basis of Bearing is as per Survey. Bearings and distances are to the center of the chiseled "X".

