


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

47-1971

History of original corner establishment:

Original survey by GLO contract.  
The original notes state;  
N 89°47'W on true line between Sections 28 and 33;  
40.26 ch. set a basalt stone 12x10x6 ins. 8" in ground for  
¼ cor. marked on N face from which;  
A fir 12" in diam bears N40°E 34 lks dist marked ¼ SBT  
A fir 4" in diam bears S48°E 12 lks dist marked ¼ SBT




Description of corner evidence found:

In section 28 found a down fir with scribe  
In section 33 found slab with scribe

Description of monument and accessories established to perpetuate the original location of this corner

At the position of the corner a new road is to be built and a monument was not placed at this time. The monument to placed after clearing and road construction

From the position of the corner two new bearing trees were established to reference the corner.  
A white fir 10" in diam bears N67°W a distance of 35.9 feet marked ¼ SBT  
A doug fir 14" in diam bears S43°W a distance of 43.3 feet marked ¼ SBT  
The distance measured to center of respective trees on the level.  
USFS bearing tree signs were placed on the bearing trees breast high facing the corner. The bearing trees were painted with red strip and blaze painted.

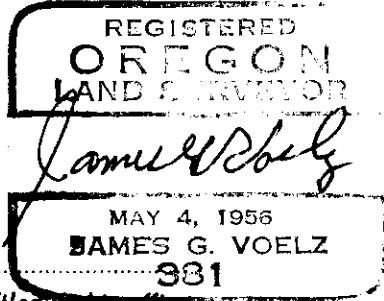

Office of \_\_\_\_\_ County surveyor \_\_\_\_\_ County of \_\_\_\_\_ Union \_\_\_\_\_  
State of \_\_\_\_\_ Oregon \_\_\_\_\_, I hereby certify that the within instrument was filed in this office  
for record on the 26 day of July 1971, at \_\_\_\_\_ o'clock \_\_\_\_\_ a.m., (signed)  
\_\_\_\_\_ County surveyor \_\_\_\_\_ by \_\_\_\_\_ (DEPUTY)  
(COUNTY OFFICIAL)

47-1971