


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Joseph G. Gray under joint contract with William H. Odell under GLO contract no. 120, dated May 27, 1867. Surveyor General record states:

Drove charred stake, dug pits and raised mounds as per instructions.

Union County survey 54-64 calls setting 1" iron pipe at corner.



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found 1" iron pipe as per survey 54-64.

See Union County survey 039-1993

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

I placed a 2 1/2" x 30" aluminum monument marked as shown below over the found 1" iron pipe. The monument sits 30" in the ground. From which:

A 5/8" x 30" iron pin (rebar) bears N58°E, 12.81 feet, with a 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, NE, S2, RP.


A 5/8" x 30" iron pin (rebar) bears S45°E, 9.00 feet, with a 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, SE, S11, RP.

A 5/8" x 30" iron pin (rebar) bears S58°W, 12.10 feet, with a 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, SW, S10, RP.

A 5/8" x 30" iron pin (rebar) bears N45°W, 8.24 feet, with a 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, NW, S3, RP.

Set a steel fence post approximately 5 feet south with Land Survey Monument sign attached

I hereby certify that the above corner point was perpetuated as hereon described on August 2, 1993.  
Witness: Jim Bennett, Travis Foster, Pete Crabtree

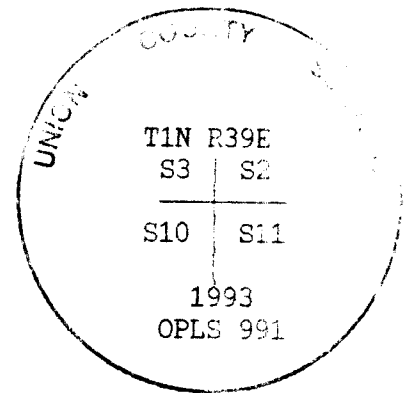

REGISTERED PROFESSIONAL LAND SURVEYOR

*Gregory T. Blackman*  
OREGON  
GREGORY T. BLACKMAN  
991

UNION COUNTY SURVEYOR

---

Date Received 9-8-93

Date Filed 9-8-93

By *Gregory T. Blackman*

File No. 035-1993R

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to the center of the 1 1/4" aluminum cap.

E-17  
5517

# HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON  
OREGON STATE PLANE, NORTH ZONE (3601)

STA. NAME: 9332

CORNER COMMON TO: 2,3,10 & 11

TWP.1 N. RGE.39 E.

DATE SET: OCT. 1993

SURVEYOR: WALTER L. CASWELL  
PLS 737

FIRM: EAGLE GPS SURVEY CORP  
13545 NW SCIENCE PARK DR  
PORTLAND, OR. 97229  
(503) 643-1073

TYPE: GPS

ORDER: SECOND CLASS: 1

GEODETIC COOR: NAD 83(91)

LAT: 45°35'14.24102" N

LONG: 117°54'42.15309" W

SP. COOR: NAD 83(91)

N: 710826.656 INT.FT.

E: 8864608.009 INT.FT.

THETA: 1°50'08.086"

SCALE FACTOR: 0.999921241

ELEV: 2691.97 US.FT.

ELEV. DATUM: NGVD 29

\*\*\*\*\*  
DIRECTIONS "TO REACH": FROM N. 10TH AVE. AND HARTFORD ST IN ELGIN  
GO EAST ON HARTFORD ST 0.2 MI TO PALMER JUNCTION RD. TURN LEFT  
AND GO NORTH 1.0 MI TO A DRIVEWAY ON THE RIGHT. TURN RIGHT AND GO  
EAST 0.2 MI TO THE STATION. THE CORNER IS A 5/8" IRON ROD WITH A  
2 1/2" ALUMINUM CAP.



EXPIRES 12/31/95

1 METER = 3.280833333333... U.S. FEET = 39.37 INCHES  
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM.  
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)  
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)

SHEET 30 OF 37