


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by Joseph G. Gray under joint contract with William H. Odell under GLO contract no. 120, dated May 27, 1867. Surveyor General record states:

Drove charred stake, dug pits and raised mounds as per instructions.



DIAGRAM

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Union County survey 037-1993.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position established by survey 039-1993 I set a 2 1/2" x 30" aluminum monument marked as shown below. The position falls in a paved county roadway the pipe is set in a water valve box. From which:

A 9" x 6" railroad tie fence post bears N86°E, 29.50 feet.


A 5/8" x 30" iron pin (rebar) bears S46°E, 39.05 feet, with 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, SE, S10, RP.

A 11" diameter fence post bears S88°W, 33.21 feet.

A 5/8" x 30" iron pin (rebar) bears N40°W, 26.05 feet, with a 1 1/4" aluminum cap marked UNION COUNTY SURVEYOR, NW, S9, RP.

I hereby certify that the above corner point was perpetuated as hereon described on July 30, 1993.

Witness: Jim Bennett, Travis Foster, Pete Crabtree

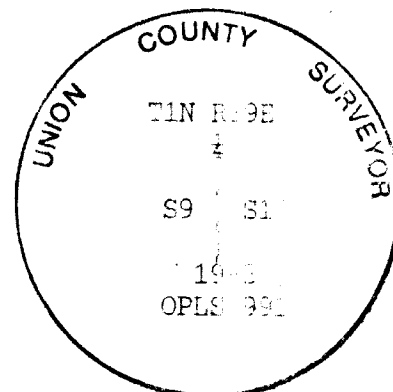

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Black

OREGON
GREGORY T. BLACKMAN
SUI

I used a steel tape & magnetic compass in establishment of new accessories. I used East magnetic declination and the distance to the center of accessory.

3-12
5708

UNION COUNTY SURVEYOR

Date Received 9-8-93

Date Filed 9-8-93

By *Gregory T. Blackman*

File No. 037-1993 R

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA. NAME: 9330

QUARTER CORNER: 9 / 10

GEODETIC COOR: NAD 83(91)

TWP.1 N. RGE.39 E.

LAT: 45°34'47.28983" N

DATE SET: OCT. 1993

LONG: 117°55'57.25708" W

SURVEYOR: WALTER L. CASWELL
PLS 737

SP. COOR: NAD 83(91)

FIRM: EAGLE GPS SURVEY CORP
13545 NW SCIENCE PARK DR
PORTLAND, OR. 97229
(503) 643-1073

N: 707927.985 INT.FT.

E: 8859356.575 INT.FT.

THETA: 1°49'14.824"

TYPE: GPS


SCALE FACTOR: 0.999920295

ORDER: SECOND CLASS: 1

ELEV: 2788.54 US.FT.

ELEV. DATUM: NGVD 29

DIRECTIONS "TO REACH": FROM S 8TH AVE. AND DIVISION ST IN ELGIN
GO WEST 0.1 MILES TO N. 10TH AVE. TURN RIGHT AND GO NORTH 1/2
MILE TO HARTFORD STREET. TURN RIGHT AND CURVE TO THE NORTH ON
PALMER JUNCTION ROAD A MILE TO A HOUSE, AND BARN, ON THE RIGHT.
TURN RIGHT ON THE GRAVEL ROAD ON THE SOUTH SIDE OF THE BARN. A
SHORT DISTANCE PAST THE BARN, YOU'LL GO THROUGH
A GATE. KEEP GOING OUT ALONG A PASTURE AND A
FIELD. STOP AT ABOUT A QUARTER OF A MILE FROM
WHERE YOU LEFT PALMER JUNCTION ROAD. THERE ARE
FENCES CLOSE AT HAND TO THE NORTH AND SOUTH.
THERE IS ALSO A DITCH RUNNING ALONG THE NORTH
SIDE OF THE ROAD. THE CORNER IS ACROSS THE
DITCH AND THE FENCE, ABOUT 5-10 FEET NORTH OF
THE FENCE TO THE NORTH OF THE ROAD. THE CORNER
IS A 5/8" IRON ROD WITH A 2 1/2" ALUMINUM CAP.



EXPIRES 12/31/95

1 METER = 3.280833333333... U.S. FEET = 39.37 INCHES
1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM.
TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)
DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)
SHEET 28 OF 37