

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:


Corner originally established by Joseph G. Gray under GLO contract Number 120, dated May 27, 1867. GLO record states:

Set post for 1/4 Sec. Cor. from which:

A Pine 24 in Diam bears N 40° W 25 lks dist
A Fir 12 in Diam bear S 71° W 50 lks dist

No record of further monumentation found in Union County survey records.

T 1 N R 39 E J-03

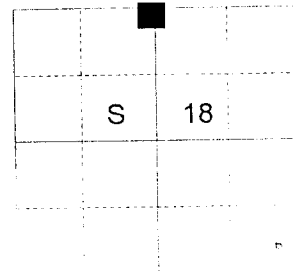

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 025-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by the survey I set a 2 1/2" x 30" aluminum pipe with cap as shown, 27 inches in the ground from which:

NEW BEARING OBJECTS AND TREES:

A 6 inch Dia. Douglas Fir bears S 71° W, a distance of 6.26 feet, marked 1/4 S18 BT

A 8 inch Dia. Douglas Fir bears S 10° W, a distance of 6.02 feet, marked X BT

An 11 inch Dia. Douglas Fir (Double Bole) bears N 41° W, a distance of 23.01 feet, marked 1/4 S7 BT

An 11 inch Dia. Douglas Fir bears N 11° W, a distance of 17.64 feet, marked 1/4 S7 BT


I hereby certify that the corner was monumented on July 28, 1998.
Witness: Rick Robinson, Jeff Madsen, Greg Engelgau, and Norb Volny.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1985
RICK G. ROBINSON
2219

Renewal Date December 31, 1998

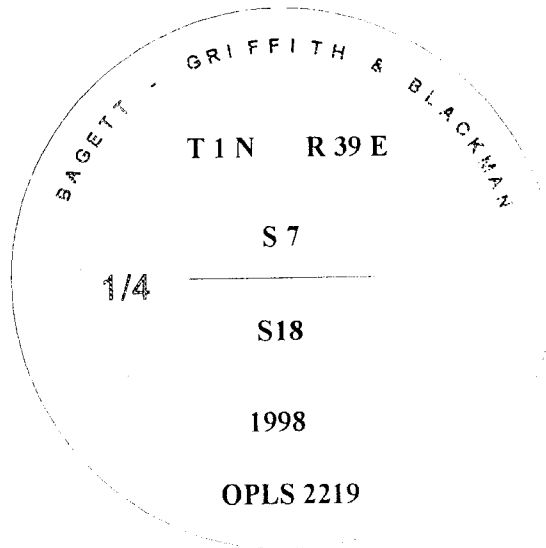

**UNION COUNTY
SURVEYOR**

Date Received 8-10-98

Date Filed 8/29/98

Filed By Gregory T. Black

File Number 017-1998 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d nail driven into the root crown of the bearing tree on the right side. I attached a brass washer marked OPLS 2219 to the BT blaze.