

**UNION COUNTY SURVEYOR**


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Joseph G. Gray under GLO contract Number 120, dated May 27, 1867. GLO record states:

T 1 N R 39 E J-07

Set post for 1/4 Sec. Cor. Post deposited marked stone and raised stone mound as per instructions, from which:

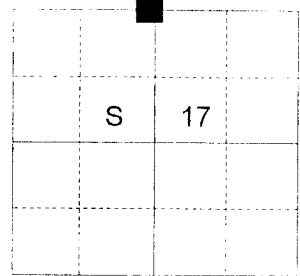

No record of further monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

Possible remains of old fence line 15 feet North of monument as established by survey.

See Survey Number 025-1998

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by the survey I set a 2 1/2" x 30" aluminum pipe with cap, marked as shown, 24 inches in the ground from which:

**NEW BEARING OBJECTS AND TREES:**

- A 5/8 inch Iron Rod with 1 1/2 inch aluminum cap bears N 18° W, a distance of 16.50 feet, marked NW RP.
- A 5/8 inch Iron Rod with 1 1/2 inch aluminum cap bears N 65° E, a distance of 13.82 feet, marked NE RP
- A 5/8 inch Iron Rod with 1 1/2 inch aluminum cap bears S 31° E, a distance of 11.68 feet, marked SE RP
- A 5/8 inch Iron Rod with 1 1/2 inch aluminum cap bears S 69° W, a distance of 14.97 feet, marked SW RP


I hereby certify that the corner was monumented on July 28, 1998.  
Witness: Jeff Madsen, Greg Engelgau, and Norb Volny.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17, 1936  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

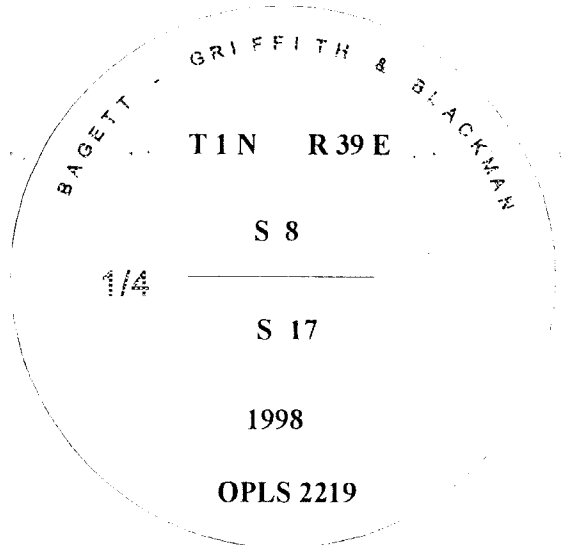

**UNION COUNTY SURVEYOR**

Date Received 8/10/98

Date Filed 8/29/98

Filed By *Hugon T. Blaza*

File Number 018-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. Distances are to the center of the bearing object. A brass washer marked OPLS 2219 was attached to the BT blaze.