


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Joseph G. Gray and William H. Odell under joint GLO contract number 120, dated May 27, 1867. Surveyor General record states: Set 1/4 section corner. Drove charred stake and raised mound of stone as per instructions.

Oregon State Highway Division calls a position to the corner on strip map number 4B-26-11.

Survey number 17-80 monumented the position called on the strip map with a 5/8" x 30" iron pin with plastic cap marked "BGA SURVEY MARKER"

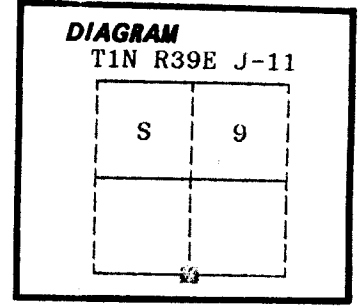

No record of subsequent monumentation found in Union County survey records.

Description of corner evidence found:

Found 5/8 inch iron pin with plastic cap marked "BGA SURVEY MARKER" set by survey number 17-80.

See survey number 7-88

Description of monument and accessories I established to perpetuate the original location of this corner:

NONE

Monument witnessed on February 25, 1988 by myself and Rick Robinson.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman
OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

UNION COUNTY
SURVEYOR

Date Received 3-14-88
Date Filed 3-16-88
By G. LANGRIZ, DEPUTY
File No. 72-88R

Office of..... County of.....
State of....., I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

(COUNTY OFFICIAL)

(DEPUTY)