

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by William Odell under GLO contract Number 120, dated May 27th, 1867. Surveyor General record states:

400 lks East of true 1/4 corner and 550 North set post for witness to 1/4 sec corner deposited marked stone and raised stone mound as per instructions.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey 001-2001

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by Survey No. 001-2001, I set a 2 1/2" x 30" aluminum monument, marked as shown below, 30" in the ground from which:

A 5/8"x30" iron pin with 1 1/2" aluminum cap in fence corner, bears N39°E, a distance of 68.01 feet, marked UNION COUNTY SURVEYOR NE RP.



A 5/8"x30" iron pin with 1 1/2" aluminum cap in North-South fence line, bears S35°E, a distance of 33.28 feet, marked UNION COUNTY SURVEYOR SE RP.

A 5/8"x30" iron pin with 1 1/2" aluminum cap, bears S37°W, a distance of 9.17 feet, marked UNION COUNTY SURVEYOR SW RP.


A 5/8"x30" iron pin with 1 1/2" aluminum cap in East-West fence line, bears N35°W, a distance of 30.80 feet, marked UNION COUNTY SURVEYOR NW RP.

I hereby certify that this corner was monumented on January 10, 2001
Witness: Norbert Volny and Gregory T. Blackman, Jr.

T 1 N R 39 E L - 17

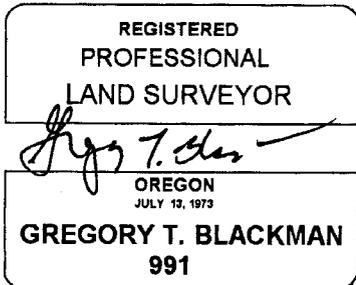

Renewal Date: Dec. 31, 2001

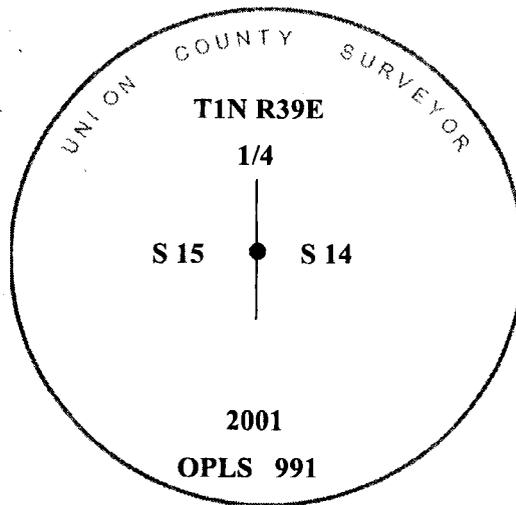

UNION COUNTY SURVEYOR
Date Received 2/13/01
Date Filed 3/2/01
Filed By R. Robinson, Deputy
File Number 003-2001R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. The distances are to the center of the aluminum cap, unless noted above.

HORIZONTAL CONTROL DATA
UNION COUNTY, OREGON
OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 200102

QUARTER COMMON TO: 14 & 15

TWP. 1 N. RGE. 39 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: 9 JAN. 2001

LAT: 45 ° 33 ' 56.88128 " N

SURVEYOR: GREGORY T. BLACKMAN
OPLS 991

LONG: 117 ° 54 ' 42.28900 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 702995.257 INT FT.

E: 8864849.315 INT FT.

TYPE: GPS

THETA: 1 ° 50 ' 7.99034943 "


ORDER: SECOND CLASS: 1

SCALE FACTOR: 0.9999185712

ELEV: 2648.47 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:



Renewal Date: Dec. 31, 2001

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)