

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
None

No record of further monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE

See Survey Number 025-1998

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the position determined by the survey I set a 2 1/2" x 30" aluminum pipe with cap 27 inches in the ground, marked as shown, from which:


NEW BEARING OBJECTS AND TREES:

A 12 inch Dia. Douglas Fir bears N 33° E, a distance of 31.13 feet, marked CS 1/16 S17BT

A 12 inch Tamarack bears S 88° E, a distance of 14.13 feet, marked CS 1/16 S17 BT.

I hereby certify that the corner was monumented on July 31, 1998.
Witness: Jeff Madsen, Greg Engelgau, and Norb Volny.

T 1 N R 39 E M-07

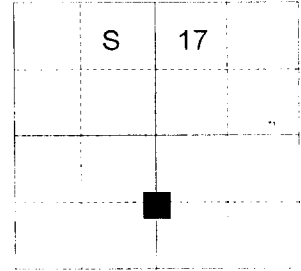


REGISTERED
PROFESSIONAL
LAND SURVEYOR

Rick G. Robinson

OREGON
July 17, 1996

RICK G. ROBINSON
2219

Renewal Date December 31, 1998

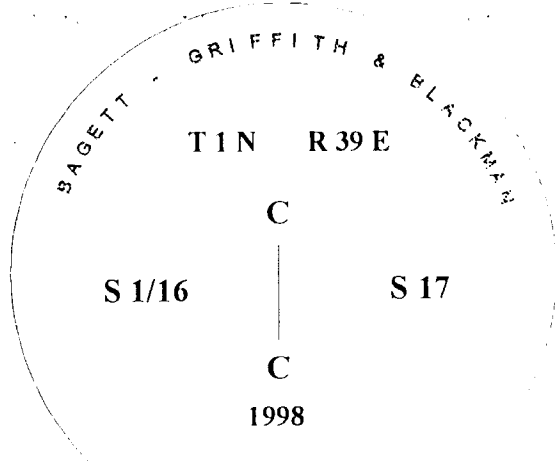

OPLS 2219

UNION COUNTY SURVEYOR

Date Received 8/10/98

Date Filed 8/29/98

Filed By *Gregory T. ...*

File Number 026-1998R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 60d nail driven into the root crown of the bearing tree on the right side.