

**UNION COUNTY SURVEYOR  
CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner not previously established

No record of monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE. See Union County Survey Number 010-2002

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**


At position established by Survey No. 010-2002 I set a 5/8"x30" iron pin with a 2" aluminum cap marked as shown below, 29" in the ground from which:

- A 5/8"x30" iron pin with 1 1/2" aluminum cap in an North-South fence, bears N47°W, a distance of 9.15 feet, marked BGB SURVEY MARKER NW RP.
- A 5/8"x30" iron pin with 1 1/2" aluminum cap in an North-South fence, bears S44°W, a distance of 9.15 feet, marked BGB SURVEY MARKER SW RP.

I hereby certify that the corner was monumented on April 8, 2002.

Witnesses: Gregory T. Blackman Jr., Norbert W. Volny

T 1 N R 39 E M-11

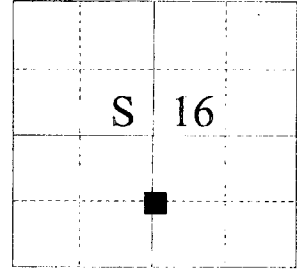


**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Rick G. Robinson*

**OREGON**  
July 17, 1986

**RICK G. ROBINSON**  
2219

Renewal Date December 31, 2002

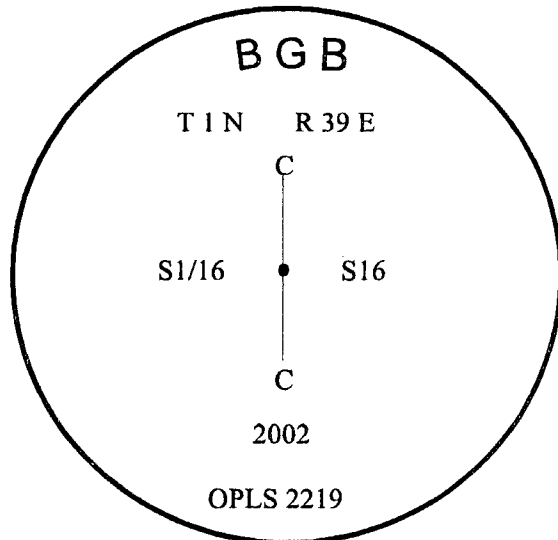

**UNION COUNTY  
SURVEYOR**

Date Received 4/10/02

Date Filed 5/4/02

Filed By *Gregory T. Blackman Jr.*

File Number 006-2002R

I used a Leica 530 GPS system with the Basis of Bearing being the same as Survey Number 010-2002 in establishment of the new accessories. The distances are to the center of cap.