

**UNION COUNTY SURVEYOR**

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

Corner originally established by Joseph G. Gray under GLO contract Number 120, dated May 27, 1867. GLO record states:

Set post for 1/4 Sec. Cor. from which:

A Fir 8 in Diam bears N 40° E 12 lks dist  
A Fir 10 in Diam bear S 20° W 12 lks dist

No record of further monumentation found in Union County survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

NONE

See Survey Number 025-1998

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED**

**TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At the position determined by the survey I set a 2 1/2" x 30" aluminum pipe with cap as shown, 28 inches in the ground from which:

**NEW BEARING OBJECTS AND TREES:**

A 15 inch Dia. Douglas Fir bears N 82° W, a distance of 15.04 feet, marked 1/4 S18 BT


A 16 inch Dia. Douglas Fir bears S 42° W, a distance of 12.86 feet, marked 1/4 S19 BT

An 8 inch Dia. Tamarack bears N 43° E, a distance of 9.62 feet, marked 1/4 S18 BT

A 6 inch Dia. Tamarack bears S 57° E, a distance of 27.08 feet, marked 1/4 S19 BT

I hereby certify that the corner was monumented on July 28, 1998.  
Witness: Jeff Madsen, Greg Engelgau, and Norb Volny.

T 1 N R 39 E N-03

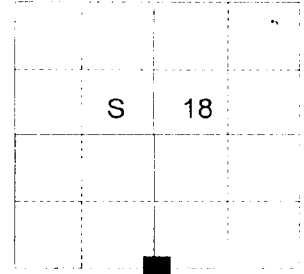


REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Rick G. Robinson*

OREGON  
July 17 1988  
RICK G. ROBINSON  
2219

Renewal Date December 31, 1998

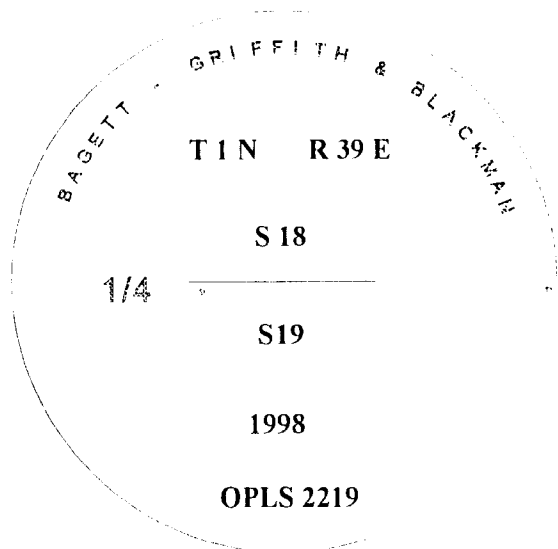

**UNION COUNTY SURVEYOR**

Date Received 8/10/98

Date Filed 8/29/98

Filed By *Greg T. Blane*

File Number 028-199812

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination. Distances are to a 60d spike driven into the root crown of the bearing tree in the right side. A brass washer marked OPLS 2219 was attached to the BT blaze.