

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Originally established by Timothy W. Davenport, Deputy Surveyor, under contract No. 102, dated July 20th, 1863. Surveyor record states:

T 1 N R 38 E R - 25

Set post for corner to section 24, 25, 19 & 30 from which:

- A Pine 12" in diameter bears N55°W;
- A Pine 12" in diameter bears S62°W, a distance of 40 links;
- A Pine 12" in diameter bears N35°E, a distance of 20 links;
- A Pine 12" in diameter bears SE, a distance of 61 links;



DESCRIPTION OF CORNER EVIDENCE FOUND:

None

See Survey Number 029-2013

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED

TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


After extensive searching for corner evidence no evidence was found for the original section corner monument. I established its position by proportionate measurement. I set a 2 1/2" x 30" aluminum pipe with a 2 1/2" aluminum cap marked as shown below from which:

- A 12" Ponderosa Pine bears N47°E, a distance of 21.05 feet, marked T1N R39E S19 BT.
- A 23" Ponderosa Pine bears S10°E, a distance of 35.00 feet, marked T1N R39E S30 BT.
- A 22" Ponderosa Pine bears S13°W, a distance of 88.05 feet, marked T1N R38E S25 BT.
- A 40" Ponderosa Pine bears N27°W, a distance of 6.30 feet, marked X BT.

I hereby certify that the corner was monumented on July 1, 2013
Witness: Daniel O. Inloes



Renewal Date: June 30, 2015

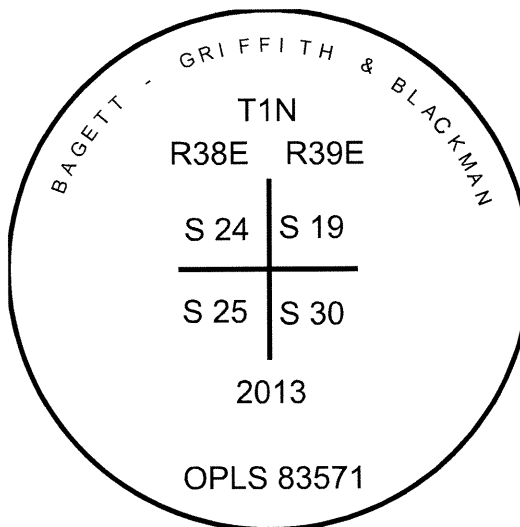

UNION COUNTY SURVEYOR

Date Received 7/3/13

Date Filed 7/3/13

Filed By Nil G. Hsu

File Number 422-2013R

I used a steel tape and magnetic compass in the establishment of the accessories. Bearings are to a brass washer marked OPLS 83571 in the upper portion of the lower blaze. I use 16' East declination. The distance are to a 60d spike driven into the right side of the root crown of the bearing trees.