


History of original corner establishment:

Corner not previously established

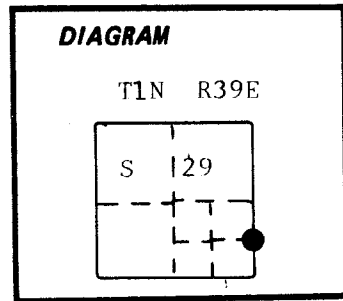

Description of corner evidence found:

NONE

See map of survey number 9-87

SWAN COUNTY  
SURVEYOR

Date Received 4-3-87

Date Filed 4-6-87

By G. LANGRIZ, DEPUTY

File No. 7-87 R

(SEE SURVEY # 9-87)

Description of monument and accessories I established to perpetuate the


original location of this corner: At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 27 inches in the ground, from which:

NEW BT's

- A 12 inch diameter Douglas Fir bears S2E 22.35 feet marked S 1/16 S28 BT
- A 15 inch diameter Douglas Fir bears N43W 40.77 feet marked S 1/16 S29 BT

Set steel fencepost approximately 1 ft. South with 54-4 sign attached

Corner monumented April 2, 1987  
Witness: Rick Robinson

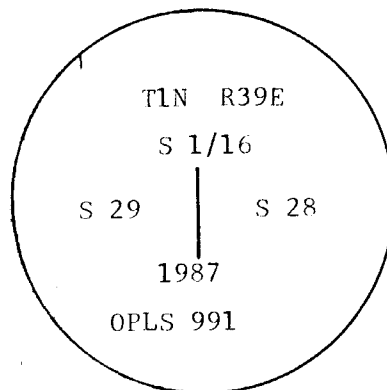

Brass washer marked OPLS 991 nailed to BT blaze. Used steel tape and magnetic compass with 20° East declination. Distances to the BT's are to a 50d spike set in the right side of tree when facing tree.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Gregory T. Blackman*

OREGON  
JULY 13, 1973  
GREGORY T. BLACKMAN  
991

Office of..... County of.....  
 State of..... I hereby certify that the within instrument was filed in this office  
 for record on the..... day of....., 19.....  
 by.....  
 (COUNTY OFFICIAL) (DEPUTY)