

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:
NONE

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:
NONE


See Survey #043-1999

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At position determined by Survey No. 043-1999 I set 2" aluminum cap on 5/8" x 30" iron pin marked as shown below, 30" in the ground from which:

- A 5/8" x 30" rebar with plastic cap bears S19°E, a distance of 92.88 feet, marked "BGB SURVEY MARKER".
- A 5/8" x 30" rebar with aluminum cap bears N46°W, a distance of 32.93 feet, marked "NW RP".

T 1 N R 40 E B - 07

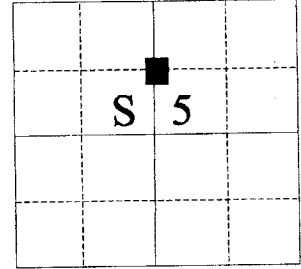


I hereby certify that the corner was monumented on December 9, 1999.
Witness: Norbert W. Volny, Gregory T. Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 1999

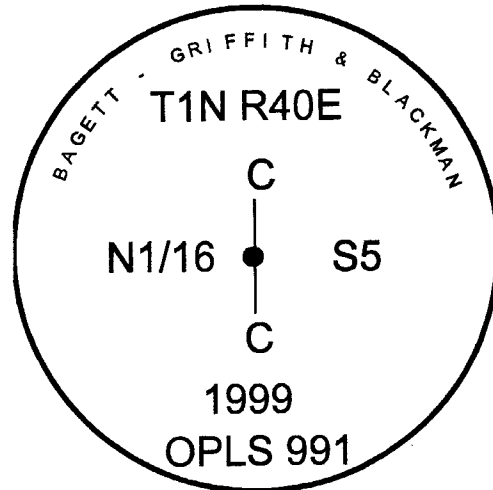

UNION COUNTY SURVEYOR

Date Received 12/14/99

Date Filed 1/7/2000

Filed By R. ROBINSON, DEPUTY

File Number 059
058-1999R

I used a total station with the same basis of bearings as Survey #023-1998 in the establishment of the new accessories. The distances are to the center of the aluminum or plastic cap.