

UNION COUNTY SURVEYOR

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by William H. Odell under GLO contract Number 120, dated May 27, 1867. Surveyor General record states:

Set 1/4 Sec post Cor drove charred stake and raised mound as per instructions.

No record of subsequent monumentation found in Union County survey records.

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See Survey #043-1999


DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At fence corner I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown below, 27" in the ground from which:

- A 5/8" x 30" rebar with aluminum cap bears N43°E, a distance of 5.87 feet, marked "UNION COUNTY SURVEYOR NE RP".
- A 5/8" x 30" rebar with aluminum cap bears S10°E, a distance of 5.29 feet, marked "UNION COUNTY SURVEYOR SE RP".
- A 5/8" x 30" rebar with aluminum cap bears S44°W, a distance of 11.83 feet, marked "UNION COUNTY SURVEYOR SW RP".
- A 5/8" x 30" rebar with aluminum cap bears N88°W, a distance of 6.34 feet, marked "UNION COUNTY SURVEYOR NW RP".

I hereby certify that the corner was monumented on November 29, 1999.
Witness: Norbert W. Volny, Gregory T. Blackman Jr.

T 1 N R 40 E C - 05



REGISTERED
PROFESSIONAL
LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

Renewal Date: Dec. 31, 1999

UNION COUNTY SURVEYOR

T1N R40E

1/4

S6 | S5

1999

OPLS 991

UNION COUNTY SURVEYOR

Date Received 12/13/99

Date Filed 1-7-2000

Filed By R. ROBINSON, DEPUTY

File Number 055-1999R

I used a total station with the same basis of bearings as Survey #023-1998 in the establishment of the new accessories. The distances are to the center of the aluminum cap.

HORIZONTAL CONTROL DATA

UNION COUNTY, OREGON

OREGON STATE PLANE, NORTH ZONE (3601)

STA NAME: 2021003

1/4 SECTION CORNER COMMON TO SECTIONS 5 AND 6

TWP. 1 N RGE. 40 E.

GEODETIC COORD: NAD 83(91)

DATE TIED: March 11, 2021

LAT: 45 ° 35 ' 43.41857 " N

SURVEYOR: JEFFREY S. HSU
OPLS 83571

LONG: 117 ° 50 ' 58.09151 " W

FIRM: BAGETT, GRIFFITH, & BLACKMAN
2006 ADAMS AVENUE
LAGRANDE, OR 97850
(541) 963-6092

SP. COOR: NAD 83(91)

N: 714296.738 INT FT.

E: 8880436.430 INT FT.

TYPE: GPS

THETA: 1 ° 52 ' 47 "

ORDER: SECOND CLASS: 1


SCALE FACTOR: 0.9999222852

ELEV: 3156.72 US FT.

ELEV: DATUM: NGVD 29

COMMENTS:

2 1/2" aluminum pipe with 2 1/2" aluminum cap
marked as shown, set in mound of stone

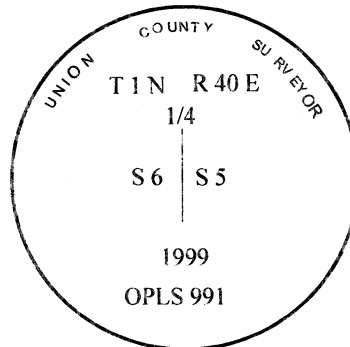

Renewal Date: June 30, 2021

1 METER = 3.2808333333... US FEET = 39.37 INCHES

1 METER = 3.280839895 INT'L FEET OR 1 INCH = 2.54 CM

TO CALCULATE ELEVATION FACTOR (IN THE NORTH AMERICAN CONTINENT)

DIVIDE 20,906,000 BY (20,906,000 + ELLIPSOID ELEV. IN FEET)