


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner was originally set by William H. Odell and Joseph G. Gray under GLO joint contract number 120, dated May 27, 1867.

Surveyor General record states:

Set post for 1/4 corner to secs 11 & 14 in mound of stone.



DIAGRAM

No record of subsequent monumentation found in Union County survey records

DESCRIPTION OF CORNER EVIDENCE FOUND:

NONE

See map of survey 037-1993.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


At the proportionate position determined by survey, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 24 inches in the ground, from which;

NEW BEARING OBJECTS:

- A 27 inch Ponderosa Pine bears N52°E, 95.36 feet marked 1/4 S 11 BT
- A 37 inch Ponderosa Pine bears S35°E, 150.40 feet marked 1/4 S 14 BT
- A 5/8 x 30 inch rebar with aluminum cap bears S46°W, 6.07 feet marked SW RP
- A 5/8 x 30 inch rebar with aluminum cap bears N41°W, 5.26 feet marked NW RP

Raised mound of stone, 3 foot base to top cap.  
Set a steel fence post approximately 5 feet East  
Attention sign attached.

I hereby certify that the above corner point was perpetuated as hereon described on August 24, 1993.  
Witness: Pete Crabtree

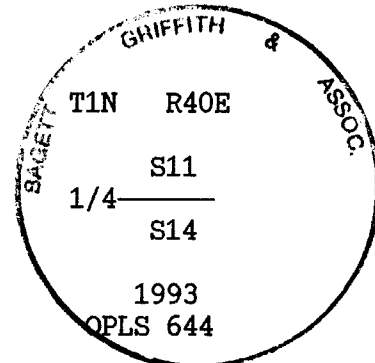

REGISTERED PROFESSIONAL LAND SURVEYOR

*Duane I. Griffith*

OREGON  
JULY 10, 1964  
DUANE I. GRIFFITH  
644

UNION COUNTY SURVEYOR

Date Received 9/3/93

Date Filed 9/10/93

By Gregory T. Black

File No. 046-1993R

I used a steel tape and magnetic compass in the establishment of new accessories. I used 20° East magnetic declination and the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 644 to the BT blaze.