


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell and Joseph G. Gray under glo joint contract number 120, dated May 27, 1867
Surveyor General record states:

Set $\frac{1}{4}$ Sec cor post from which:

- A pine 10 in dia bears N05°E 38 lks
- A pine 10 in dia bears S06°W 162 lks

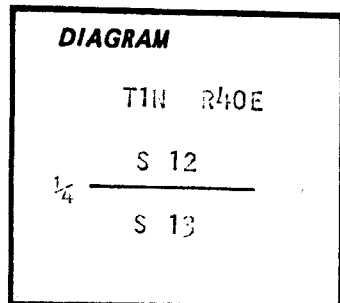

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the

original location of this corner: At proportionate position, I set a 2 $\frac{1}{2}$ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground from which:

New BTs

- A 13 inch diameter red fir bears S43°E 54.0 feet marked $\frac{1}{4}$ S13 BT
- A 14 inch diameter P.Pine bears S18°W 70.3 feet marked $\frac{1}{4}$ S13 BT

NOTE: Trees available to Section 12 fall in yard of private residence.
I therefore take two BTs in Section 13

Corner set May 11, 1984

Witnesses: Duane Griffith and Rick Robinson

UNION COUNTY SURVEYOR

Date Received 5-29-84

Date Filed 5-31-84


By G. LANGLITZ DEPUTY

File No. 861-84 R

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

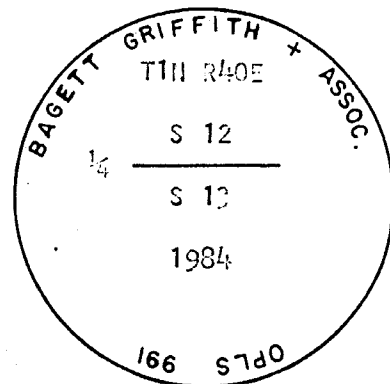

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 991 by the BT blaze of new BTs.

See survey number 21-84

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)