


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell and Joseph G. Gray under glo joint contract number 120, dated May 27, 1867
Surveyor General record states:

Set 1/4 Sec cor post from which:

- A pine 6 in dia bears S90°W 92 lks
- A pine 8 in dia bears N70°E 128 lks

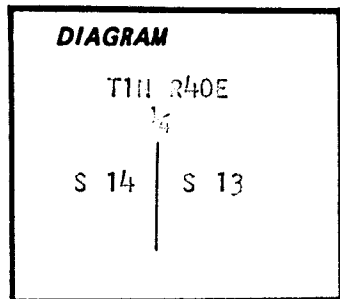

Description of corner evidence found:

Found 2 1/4 inch m/1 pine stump West 60.7 feet with scribes visible

Distance from face of blaze

GLO notes also state that at 45.5 chains the line crosses a spring branch. I find that the spring branch is in fact at 40.5 chains. In my opinion the channel of the branch has not changed. I mention this only for the future record, in the case of placing a lost corner by proportion using topographic calls.

Description of monument and accessories I established to perpetuate the

original location of this corner: At record bearing and distance from the above described BT, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 30 inches in the ground, from which:

New BTs

- A 12 inch diameter red fir bears N64°E, 25.3 feet marked 1/4 S13 BT
- A 14 inch diameter P.Pine bears S47°W, 26.6 feet marked 1/4 S14 BT

Corner set May 10, 1984

Witnesses: Duane Griffith and Rick Robinson

UNION COUNTY SURVEYOR

Date Received 5-29-84

Date Filed 5-31-84


By G. LANGUTZ DEPUTY

File No. 864-84R

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

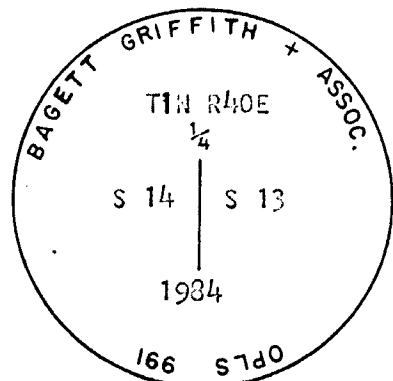

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 991 by the BT blaze of new BTs.

See survey number 21-84

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office
 for record on the..... day of....., 19.....
 by
 (COUNTY OFFICIAL) (DEPUTY)