


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not originally established



Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, from which:


New BTs

- A 10 inch diameter tamarack bears West 40.2 feet marked C¼ S13 BT
- A 10 inch diameter tamarack bears North 17.5 feet marked C¼ S13 BT

Corner set May 14, 1984

Witness: Rick Robinson

See survey number 21-84

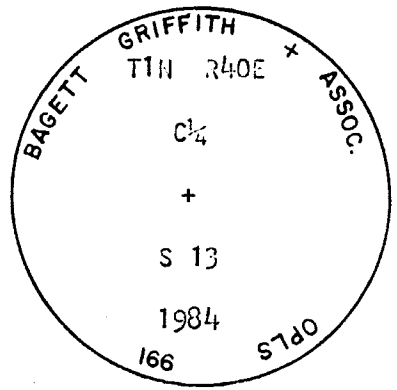

UNION COUNTY SURVEYOR

Date Received 5-29-84

Date Filed 5-31-84

By G. LANGLITZ DEPUTY

File No. 863-84R

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
 991

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree. I placed a brass washer marked OPLS 991 by the BT blaze of new BTs

Office of..... County of.....
 State of....., I hereby certify that the within instrument was filed in this office for record on the..... day of....., 19.....

..... by
 (COUNTY OFFICIAL) (DEPUTY)