


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by William H. Odell and Joseph G. Gray under GLO Contract number 120 (joint contract) dated May 27, 1867. Surveyor General record states: made cor for Secs 13, 24, 18 & 19 a larch 6 in dia from which:
A larch 10 in dia bears S70°E 20 lks
A larch 7 in dia bears S45°W 23 lks
A larch 18 in dia bears N41°W 23 lks
A fir 6 in dia bears N45°E 4 lks

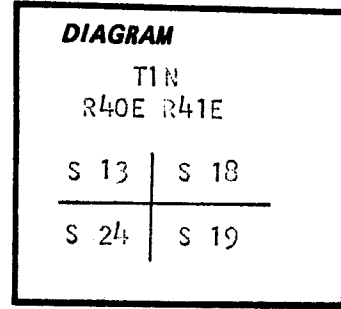

Description of corner evidence found:

NONE

Description of monument and accessories I established to perpetuate the original location of this corner:


At proportionate position, I set a 2½ inch x 30 inch aluminum pipe with aluminum cap marked as shown, 24 inches in the ground from which:

New BTs

- A 10 inch diameter white fir bears N6°E 23.0 feet marked T1N R41E S18 BT
- A 8 inch diameter red fir bears S70°E 30.1 feet marked T1N R41E S19 BT
- A 12 inch diameter white fir bears S67°W 27.3 feet marked T1N R40E S24 BT
- A 12 inch diameter white fir bears N85°W 39.1 feet, marked T1N R40E S13 BT

Corner falls in northerly edge of skid road
Raised mound of stone around monument
Corner set May 11, 1984
Witnesses; Duane Griffith and Rick Robinson

See survey number 21-84

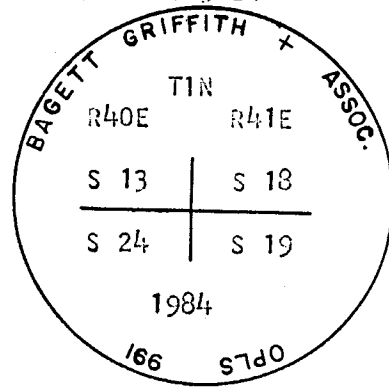

UNION COUNTY SURVEYOR
Date Received 5-29-84
Date Filed 5-31-84
By G. LANGLITZ DEPUTY
File No. 865-84 R

REGISTERED PROFESSIONAL LAND SURVEYOR

Gregory T. Blackman

OREGON
JULY 13, 1973
GREGORY T. BLACKMAN
991

I used a steel tape and magnetic compass in the establishment of accessories. I used 18° East magnetic declination, and distances to the new BTs are to the center of the tree.

Office of..... County of.....
State of..... I hereby certify that the within instrument was filed in this office
for record on the..... day of....., 19.....

..... by
(COUNTY OFFICIAL) (DEPUTY)