


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

Corner originally established by William H. Odell under joint contract with Joseph G. Gray under contract number 120, dated May 27, 1867. Surveyor's record states: Drove charred stake and raised stone mound.

Survey 95-74 states "Found 1/4 cor as per GLO notes".

No record of subsequent monumentation found in UNION COUNTY survey records.

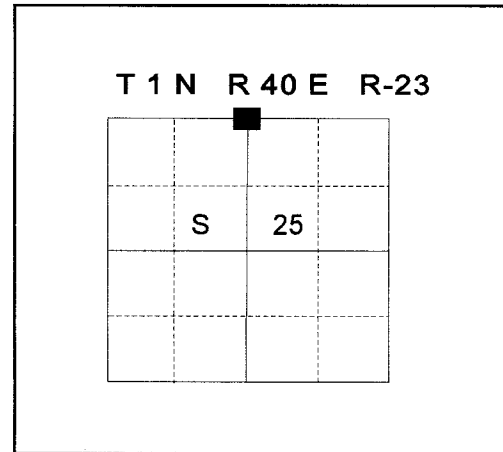

DESCRIPTION OF CORNER EVIDENCE FOUND:

Found mound of stone with 50d spike in it, probably from survey 95-74.

See Survey Number 023-1997.

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the found mound of stone, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 24" in the ground, with mound of stone 3' at the base, from which:

BEARING TREES:

- A 12" Ponderosa Pine bears N31°35'E, 58.95 feet, marked 1/4 S24 BT.
- A 14" Ponderosa Pine bears S44°02'E, 25.26 feet, marked 1/4 S25 BT.
- A 6" Ponderosa Pine bears S35°16'W, 23.70 feet, marked X BT.
- A 14" Ponderosa Pine bears N50°54'W, 105.11 feet, marked 1/4 S24X BT.


I hereby certify that the corner was monumented on July 24, 1997. Witnesses: Jeff Madsen and Greg Blackman Jr.

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Jeffery P. Petersen
OREGON
JULY 20, 1993
JEFFERY P. PETERSEN
2625

Renewal Date: December 31, 1998

**UNION COUNTY
SURVEYOR**
Date Received 8-6-97
Date Filed 8-6-97
Filed By R. Robinson, Deputy
File Number 015-1997 R

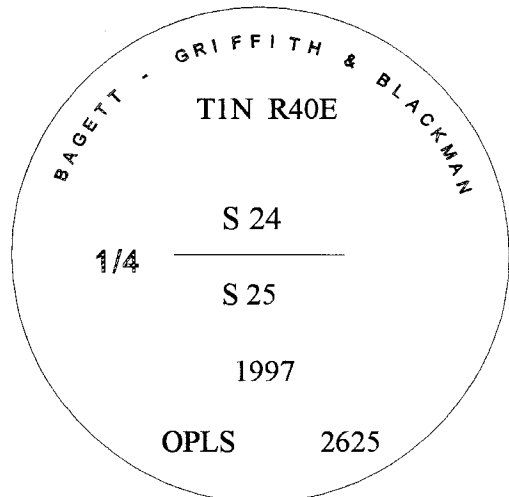

I used a EDM and theodolite to measure the bearings and distances to the bearing trees. The basis of bearing is the same as the survey 023-1997. The distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2625 to the bearing tree blaze.