

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**HISTORY OF ORIGINAL CORNER ESTABLISHMENT:**

None


Survey 95-74 indicates position for this corner.

No record of subsequent monumentation found in UNION COUNTY survey records.

**DESCRIPTION OF CORNER EVIDENCE FOUND:**

None

See Survey Number 024-1997.

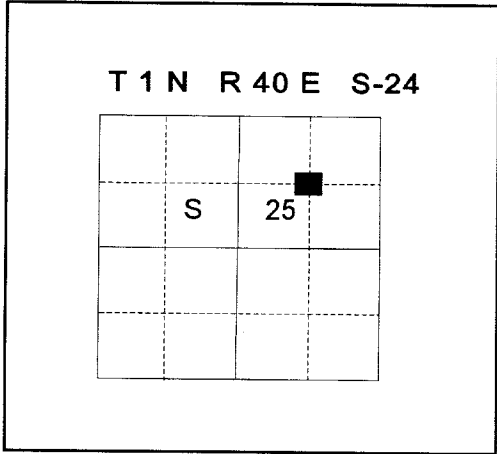

**DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:**

At position determined by survey, I set a 2 1/2" x 30" aluminum pipe with 2 1/2" aluminum cap marked as shown below, 28" in the ground, with ring of stone.

**BEARING TREES:**

A 20" Ponderosa Pine bears N75°W, 35.5 feet, marked NE1/16 S25 BT.

A 14" Ponderosa Pine bears N12°E, 80.7 feet, marked X BT.

I hereby certify that the corner was monumented on August 1, 1997.  
Witnesses: Jeff Madsen and Greg Blackman Jr.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jeffery P. Petersen*

OREGON  
JULY 20, 1893

**JEFFERY P. PETERSEN**  
**2625**

*Renewal Date: December 31, 1998*

BAGETT - GRIFFITH & BLACKMAN

T1N R40E

NE 1/16

S25

1997

OPLS 2625

**UNION COUNTY  
SURVEYOR**

Date Received 8-6-97

Date Filed 8-6-97

Filed By R. ROBINSON, Deputy

File Number 013-1997 R

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2625 to the bearing tree blaze.