


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

HISTORY OF ORIGINAL CORNER ESTABLISHMENT:

None

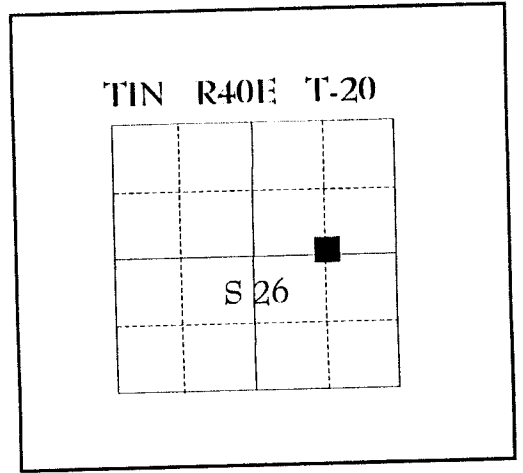

No record of subsequent monumentation found in Union County survey records  
DESCRIPTION OF CORNER EVIDENCE FOUND:

See survey 017-1995

DESCRIPTION OF MONUMENT AND ACCESSORIES I ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


I set a 2½" x 30" aluminum pipe with aluminum cap marked as shown, 28 inches in the ground, with a mound of stone 3 feet at the base around the pipe, from which;

NEW BEARING TREES:

- A 14" Douglas Fir bears S40E, 22.58 feet, marked CE 1/16 S26 BT.
- A 8" Ponderosa Pine bears N85W, 22.48 feet, marked CE 1/16 S26 BT.

I hereby certify that the above corner point was perpetuated as hereon described on May 23, 1995.

Witness: Jamie Petersen, Peter Crabtree

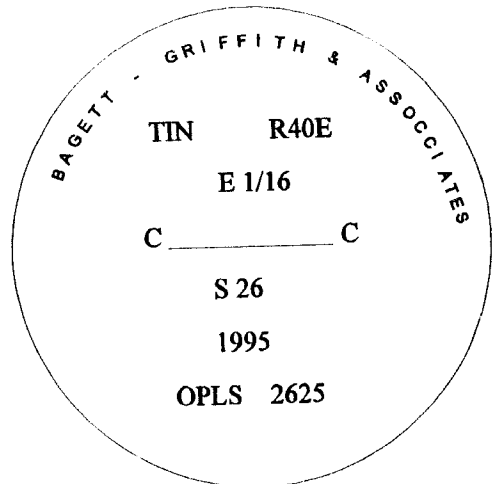

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Jeffery P. Petersen*

OREGON  
JULY 29, 1983  
JEFFERY P. PETERSEN  
2625

Renewal Date: December, 31 1996

I used a steel tape and magnetic compass in the establishment of the new accessories. I used 18° East declination, the distances are to a 50d spike driven in the right side of the root crown. I attached a brass washer marked OPLS 2625 to the bearing tree blaze.

**UNION COUNTY  
SURVEYOR**

---

Date Received 6-1-95

Date Filed 6-1-95

Filed By *J. G. Black*

File Number 006-1995 R